


STORM'S
*Radios and
 Accessories*
 (Wholesale)

*Type 340
 "SPECIAL"
 MF 128 kHz.*

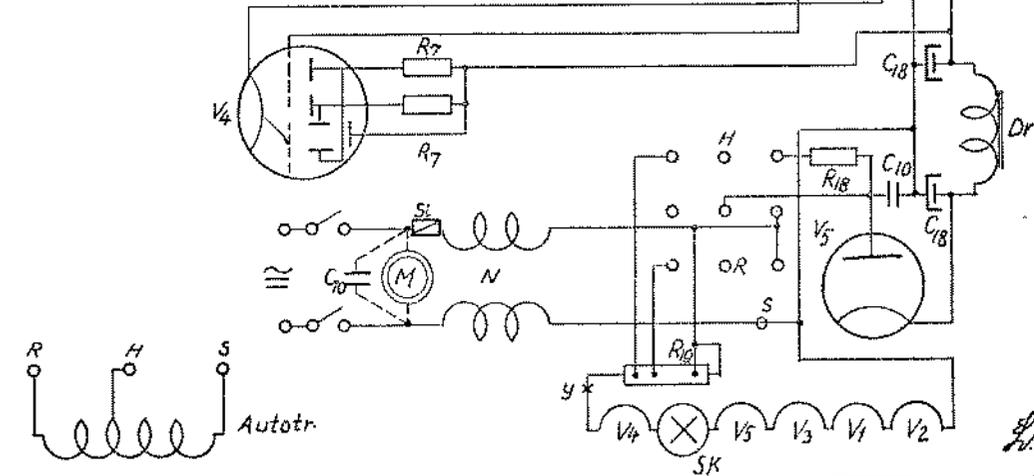

PL 44

C 1	5000	p F	Kondensator	2000 V. Vekselstrom
C 2	10	—	—	1500 V. Jævnstrom
C 3	220	—	—	1500 V. Jævnstrom
C 4	1630	—	—	1500 V. Jævnstrom
C 5	3×410	—	Afstemmingskondensator	—
C 6	20.000	—	Kondensator	2000 V. Vekselstrom
C 7	200	—	—	1500 V. Jævnstrom
C 8	7500	—	—	1500 V. Jævnstrom
C 9	600	—	—	1500 V. Jævnstrom
C 10	0.1	M F	—	2000 V. Vekselstrom
C 11	50	p F	—	1500 V. Jævnstrom
C 12	10	—	—	1500 V. Jævnstrom
C 13	100	—	—	1500 V. Jævnstrom
C 14	0.1	M F	—	1500 V. Jævnstrom
C 15	3000	p F	—	2000 V. Vekselstrom
C 16	50	M F	Elektrolyt	12 Volt
C 17	40	p F	Trimmerkondensator	Keramisk
C 18	20	M F	Elektrolyt	320—350 Volt
C 19	50.000	p F	Kondensator	2000 V. Vekselstrom
Dr.	300	Ohm	Filterspole	—
L 1			Sugekredsspole	—
L 2			1 M F Transformator	—
L 3			2 M F —	—
N			Netfilterspoler	—
O 1			Antenne-Omskifter	—
O 2			Baandfilter-Omskifter	—
O 3			Oscillator-Omskifter	—
O 4			Grammofon-Omskifter	—

R 1	50.000	Ohm	Modstand	1/2 Watt
R 2	50.000	—	—	3/4 —
R 3	20.000	—	—	3/4 —
R 4	350	—	—	3/4 —
R 5	0,5 Mg	—	—	1/2 —
R 6	200	—	—	1/2 —
R 7	1 Mg	—	—	1/2 —
R 8	40.000	—	—	3/4 —
R 9	6800	—	—	3/4 —
R 10	100	—	—	3/4 —
R 11	60.000	—	—	3/4 —
R 12	320	—	—	1/2 —
R 13	50.000	—	—	3/2 —
R 14	5 Mg	—	—	3/2 —
R 15	0,1 -	—	—	1/2 —
R 16	0,5 -	—	Potentiometer (Styrke)	—
R 17	180	—	Modstand	1/1 —
R 18	100	—	—	2 —
R 19	725	—	—	20 —
Si	0.3 Amp.		Sikring	—
Sk	10 V, 0,23 A.		Skalalampe	—
Ty			Udgangstransformator	—
V 1	E C H 3		Triode-Hexode	—
V 2	E F 9		H. F. Penthode	—
V 3	C B L 1		Duodiode-Penthode	—
V 4	E M 4		»Magisk Øje«	—
V 5	C Y 1		Ensretter	—