


JUNE '86

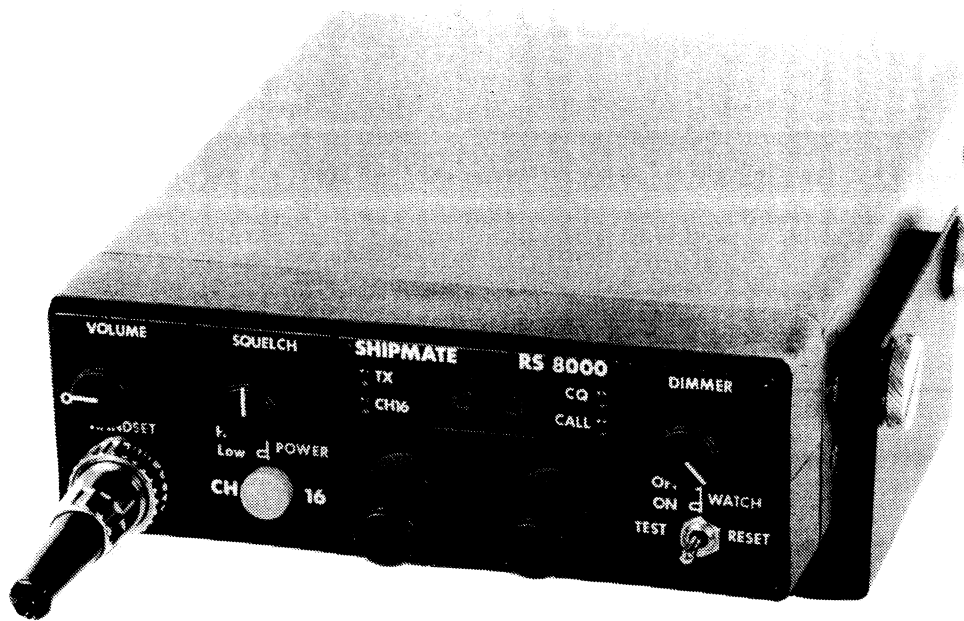

Service manual

NO. 183.2018.001

INTERNATIONAL MARINE VHF CHANNELS					
CHANNEL	DUPLEX	PUBLIC	PORT	SHIP	REMARKS
1	o	o	o		
2	o	o	o		
3	o	o	o		
4	o	o	o		
5	o	o	o		
6				o	
7	o	o	o		
8				o	
9			o	o	
10			o	o	
11			o		
12			o		
13			o	o	
14			o		
15			o	o	
16 SAFETY - CALLING					
17			o	o	
18	o		o		
19	o		o		
20	o		o		
21	o		o		
22	o		o		
23	o	o			
24	o	o			
25	o	o			
26	o	o			
27	o	o			
28	o	o			
P1					
P2					
60	o	o	o		
61	o	o	o		
62	o	o	o		
63	o	o	o		
64	o	o	o		
65	o	o	o		
66	o	o	o	o	
67			o		
68			o		
69			o	o	
70	DIGITAL SELCALL				
71			o		
72				o	
73			o	o	
74			o		
77				o	
78	o		o		
79	o		o		
80	o		o		
81	o		o		
82	o	o	o		
83	o	o			
84	o	o	o		
85	o	o			
86	o	o			
87	o	o			
88	o	o			
P3					
P4					

CHANNEL	DUPLEX	PUBLIC	PORT	SHIP	REMARKS
1	o	o	o		
2	o	o	o		
3	o	o	o		
4	o	o	o		
5	o	o	o		
6				o	
7	o	o	o		
8				o	
9			o	o	
10			o	o	
11			o		
12			o		
13			o	o	
14			o		
15			o	o	
16 SAFETY - CALLING					
17			o	o	
18	o		o		
19	o		o		
20	o		o		
21	o		o		
22	o		o		
23	o	o			
24	o	o			
25	o	o			
26	o	o			
27	o	o			
28	o	o			
P1					
P2					

CHANNEL	DUPLEX	PUBLIC	PORT	SHIP	REMARKS
60	o	o	o		
61	o	o	o		
62	o	o	o		
63	o	o	o		
64	o	o	o		
65	o	o	o		
66	o	o	o	o	
67			o		
68			o		
69			o	o	
70	DIGITAL SELCALL				
71			o		
72				o	
73			o	o	
74			o		
77				o	
78	o		o		
79	o		o		
80	o		o		
81	o		o		
82	o	o	o		
83	o	o			
84	o	o	o		
85	o	o			
86	o	o			
87	o	o			
88	o	o			
P3					
P4					



TABLE OF CONTENT

1. TABLE OF CONTENT
2. SPECIFICATIONS
 - 2.1. General
 - 2.2. Transmitter
 - 2.3. Receiver
 - 2.4. Selcall
3. OPERATION
4. INSTALLATION
5. FREQUENCY TABLES
6. MECHANICAL LAY OUT
7. BLOCKDIAGRAM
8. CIRCUIT DESCRIPTION
 - 8.1. General
 - 8.2. Receiver
 - 8.3. Synthesizer
 - 8.4. TX-driver
 - 8.5. Modulator
 - 8.6. TX-power amplifier
 - 8.7. Channel codes
9. ALIGNMENT
 - 9.1. Alignment of VCO
 - 9.2. Alignment of channel frequency
 - 9.3. Alignment of receiver RF and IF
 - 9.4. Alignment of TX-driver
 - 9.5. Alignment of VHF-PA
 - 9.6. Alignment of modulator
 - 9.7. Alignment of receiver AF and SQ
 - 9.8. Alignment and coding of SELCALL
10. OPTIONS
 - 10.1. 24 V regulator
 - 10.2. 220 V regulator
 - 10.3. Selcall
11. DIAGRAM
12. PARTS LISTS

2. SPECIFICATIONS

2.1. GENERAL

Channels:	55 international marine channels 15 private channels available
Channel spacing:	25 KHz
Mode of operation:	Simplex/Semiduplex
Temperature range:	-20°C to +55°C
Frequency stability:	±10 ppm
Supply voltage:	12 V Battery 24 V by separate converter 220 V by separate converter
Current drain:	Transmit high power (25 W), 4,5 A Transmit low power (1 W), 1,5 A Stand by 0,6 A
Dual Watch:	Channel 16 plus an operator selected channel
Aut. Ch. 16:	Separate push button for channel 16
Weight:	2,5 kg
Dimensions:	56 x 160 x 210 mm

All measurements according to CEPT.

2.2. TRANSMITTER

Frequency range:	155,0 MHz - 159,0 MHz
Power output:	25 Watts, 1 W reduced power
Spurious emission:	-80 dB
AF response:	6 dB/octave
Modulation:	±5 KHz
Ant. impedance:	50 ohms

2.3. RECEIVER


Frequency range:	155,0 MHz - 159,0 MHz 159,6 MHz - 163,6 MHz
Sensitivity:	0,3 uV/12 dB SINAD
Intermodulation:	70 dB
AF output power:	4 W in 4 ohms
Squelch:	Adjustable from 6 dB to 20 dB SINAD
Distortion:	3%

2.4. SELCALL

Alarm:	Acoustic signal in loudspeaker Light indication for received sel- call and/or for received CQ-call
Ext. Alarm:	Relay contact Max. 100 V Max. 1 A. Max. 10 VA






Build in automatic test facility for the selcall.

3. OPERATION

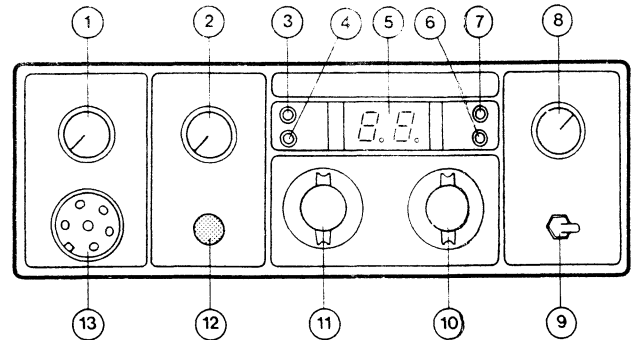


1. ON/OFF switch and volume control for external loudspeaker. The volume control will have no effect on the handset earphone level.
2. To mute the receiver noise in periods with no signal, the squelch control knob should be turned clockwise until noise cut-off occurs.
25 W transmitter power when the knob is pushed in.
1 W transmitter power when the knob is pulled out.
3. Transmitter indicator. Indicates that the transmitter is operating.
4. DUAL WATCH indicator. Indicates that the DUAL WATCH function is on. In this condition it is not possible to transmit.
5. Channel indicator.
6. CALL indicator. Indicates that a selective tone call has been received from a coast station.
7. CQ indicator. Indicates that a CQ/ALARM call has been received either from your own testbutton or from a coast station.
NB: Both these indicators will be illuminated if the SELCALL module is tested from the front panel test switch.
8. Dimmer control and DUAL WATCH switch. By means of the dimmer control the light intensity in the channel display and indicators can be regulated.
DUAL WATCH is on when the knob is pulled out.
DUAL WATCH is off when the knob is pushed in.
- 9A. TEST RESET switch for SELCALL.
By selecting the TEST position of this switch for approx. 1 sec. the SELCALL module can be tested. The CALL and CQ indicators will be illuminated and an alarm signal will be heard in the loudspeaker. By selecting the RESET position the CALL and CQ indicators will go off and the SELCALL module is reset.
- 9B. Optional extra U.S. channels.
If the SELCALL module is not fitted, a switch can be included in place of the SELCALL switch to select either U.S. or INTERNATIONAL channels.
10. Channel selector. Selects second channel digit.
11. Channel selector. Selects first channel digit.
12. CH 16 knob. When it is pushed the radiotelephone operates on the calling and distress channel. The channel display will indicate 16. The channel selector switches are overridden and the DUAL WATCH function is inhibited. By again pushing the CH 16 knob the radiotelephone reverses to the channel set by the channel selector switches.
13. Handset connector.


4. INSTALLATION

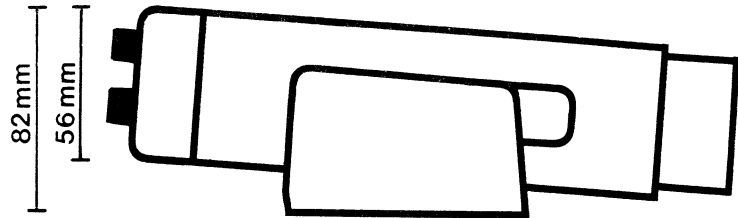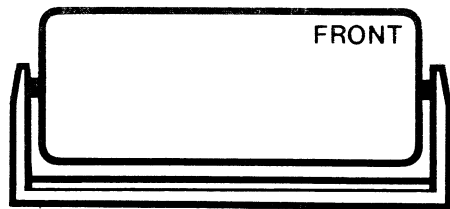



TABLE



BULKHEAD



DECKHEAD

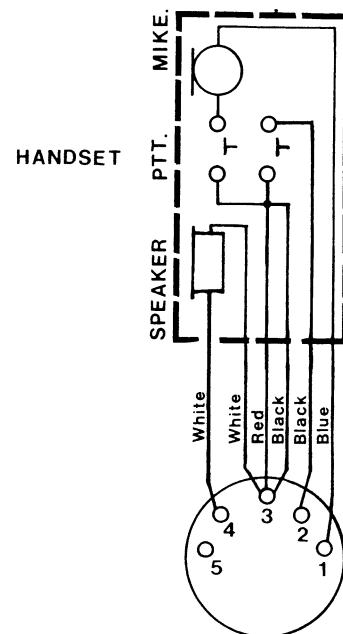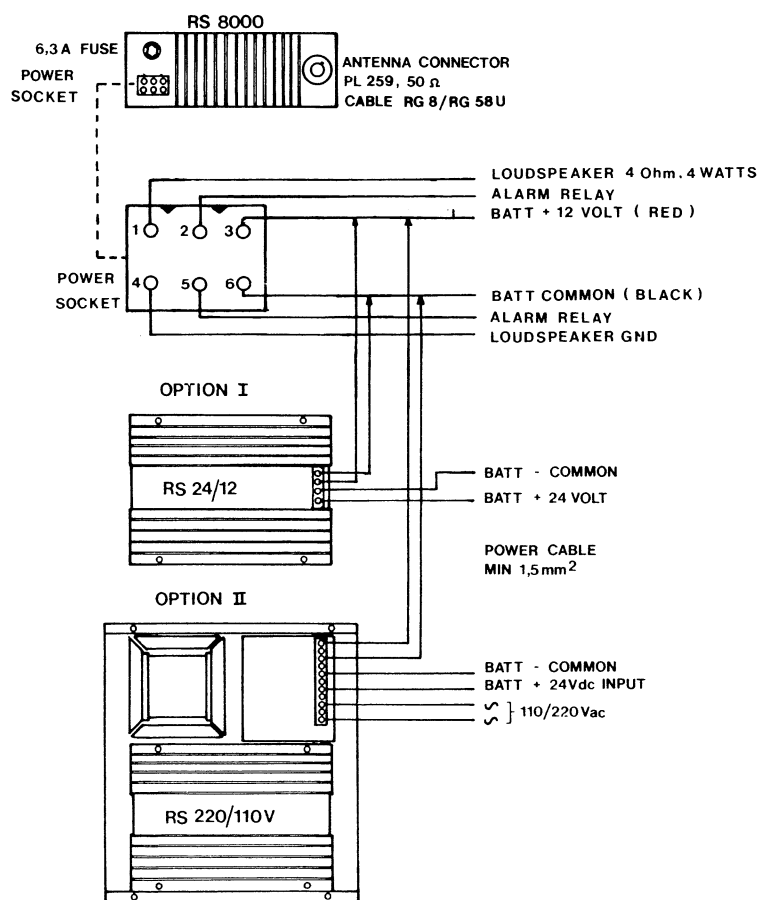


5. FREQUENCY TABLES

CHANNEL	Tx-FREQ. MHz	Rx-FREQ. MHz	Sy-FREQ. MHz	CHANNEL	Tx-FREQ. MHz	Rx-FREQ. MHz	Sy-FREQ. MHz	CHANNEL	Tx-FREQ. MHz	Rx-FREQ. MHz	Sy-FREQ. MHz
1	156.050	160.650	149.950	16	156.800	156.800	146.100	60	156.025	160.625	149.925
1	156.050	160.700	156.050	16	156.800	156.800	156.800	60	156.025	156.025	156.025
2	156.100	160.750	150.050	17	156.850	156.850	146.150	61	156.075	160.675	149.975
2	156.100	160.750	156.100	17	156.850	156.850	156.850	61	156.075	156.075	156.075
3	156.150	160.800	150.100	18	156.900	161.500	150.800	62	156.125	160.725	150.025
3	156.150	160.800	156.150	18	156.900	156.900	156.900	62	156.125	156.125	156.125
4	156.200	160.850	150.150	19	156.950	161.550	150.850	63	156.175	160.775	150.075
4	156.200	160.850	156.200	19	156.950	156.950	156.950	63	156.175	156.175	156.175
5	156.250	160.900	150.200	20	157.000	161.600	150.900	64	156.225	160.825	150.125
5	156.250	160.900	156.250	20	157.000	157.000	157.000	64	156.225	156.225	156.225
6	156.300	160.950	145.600	21	157.050	161.650	150.950	65	156.275	160.875	150.175
6	156.300	160.950	156.300	21	157.050	157.050	157.050	65	156.275	156.275	156.275
7	156.350	161.000	150.250	22	157.100	161.700	151.000	66	156.325	160.925	150.225
7	156.350	161.000	156.350	22	157.100	157.100	157.100	66	156.325	156.325	156.325
8	156.400	161.050	145.700	23	157.150	161.750	151.050	67	156.375	156.375	156.375
8	156.400	161.050	156.400	23	157.150	157.150	157.150	67	156.375	156.375	156.375
9	156.450	161.100	145.750	24	157.200	161.800	151.100	68	156.425	156.425	156.425
9	156.450	161.100	156.450	24	157.200	157.200	157.200	68	156.425	156.425	156.425
10	156.500	161.150	145.800	25	157.250	161.850	151.150	69	156.475	156.475	156.475
10	156.500	161.150	156.500	25	157.250	157.250	157.250	69	156.475	156.475	156.475
11	156.550	161.200	145.850	26	157.300	161.900	151.200	70	156.525	156.525	156.525
11	156.550	161.200	156.550	26	157.300	157.300	157.300	70	156.525	156.525	156.525
12	156.600	161.250	145.900	27	157.350	161.950	151.250	71	156.575	156.575	156.575
12	156.600	161.250	156.600	27	157.350	157.350	157.350	71	156.575	156.575	156.575
13	156.650	161.300	145.950	28	157.400	162.000	151.300	72	156.625	156.625	156.625
13	156.650	161.300	156.650	28	157.400	157.400	157.400	72	156.625	156.625	156.625
14	156.700	161.350	146.000					73	156.675	156.675	156.675
14	156.700	161.350	156.700					73	156.675	156.675	156.675
15	156.750	161.400	146.050					74	156.725	156.725	156.725
15	156.750	161.400	156.750					74	156.725	156.725	156.725

SHIPMATE RS 8000



7. BLOCKDIAGRAM

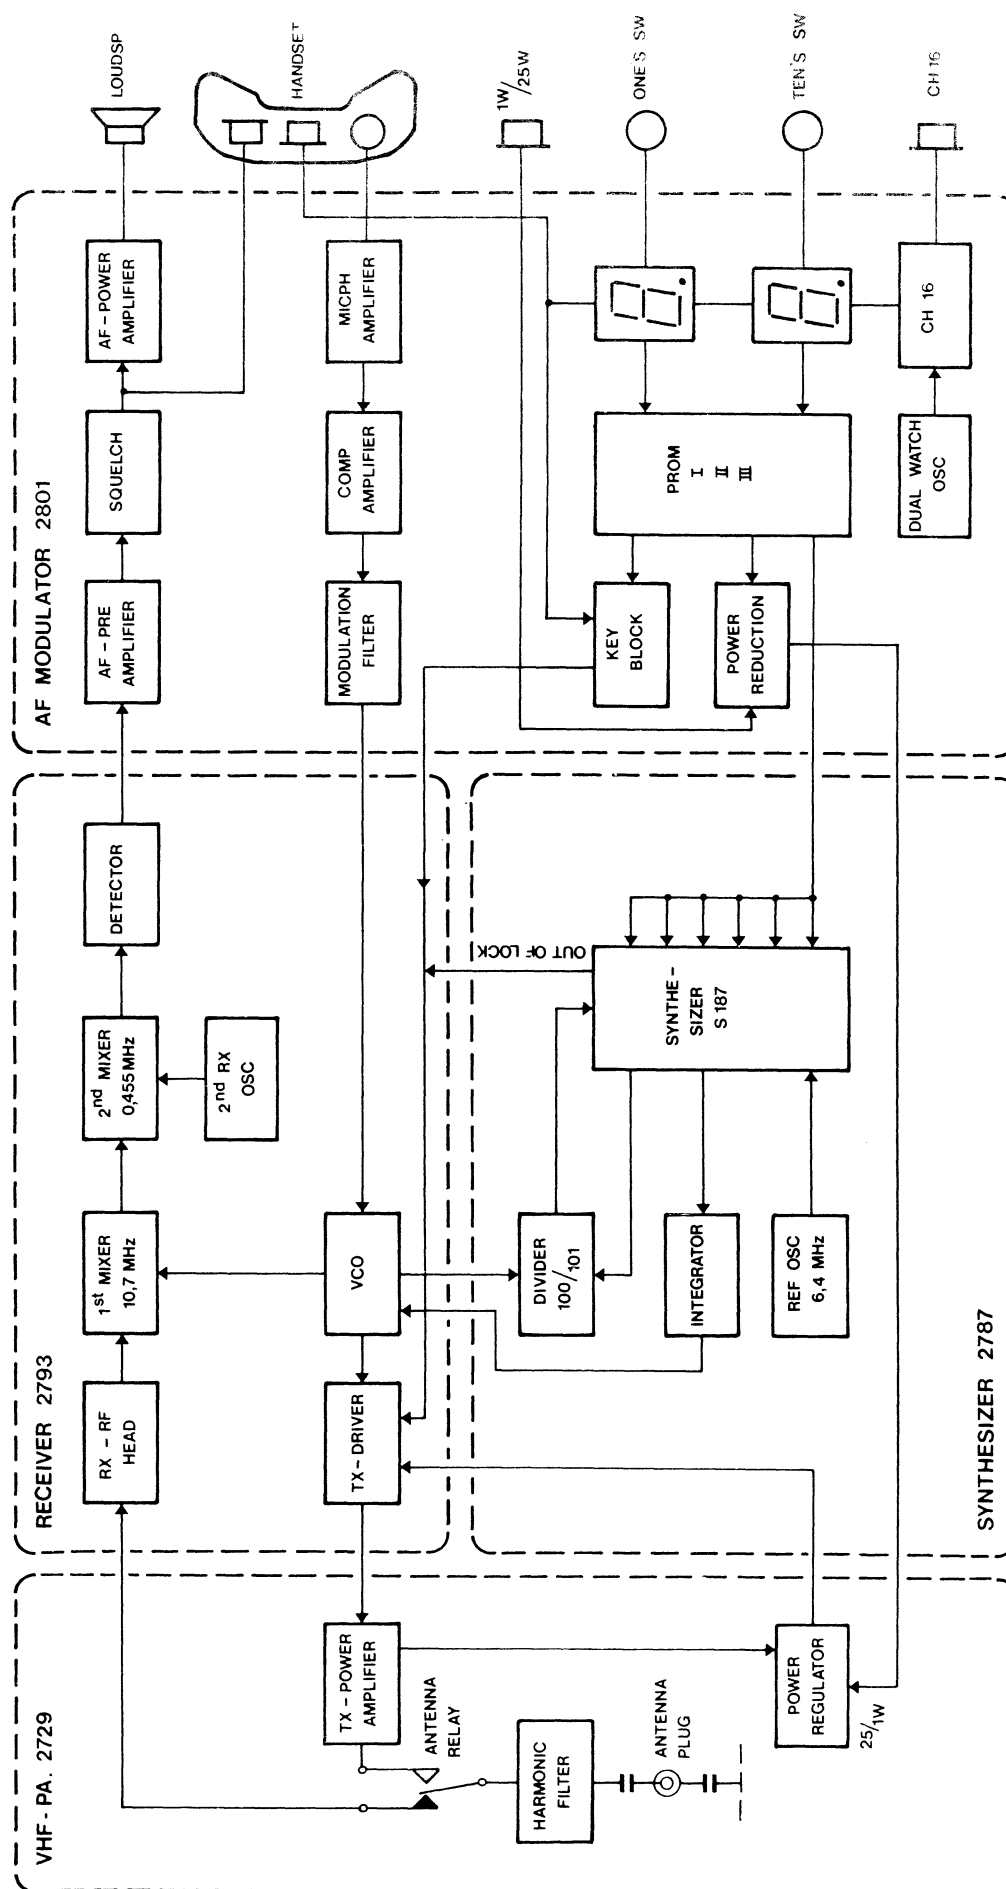

8.7. CHANNEL CODES

CHANNEL		PROM I				PROM II					PROM III				
Receiver	ADR	M4	M2	M1	A32	ADR	A4	A8	A2	A64	ADR	A16	Simpl	M8	BL
0	240	1	1	1	1	135	1	1	1	1	240	1	1	1	1
1	248	1	1	1	1	143	0	0	0	1	248	0	1	0	0
2	244	0	0	0	0	199	0	0	0	0	244	0	1	1	0
3	252	0	0	0	0	207	1	0	0	0	252	0	1	1	0
4	242	0	0	0	0	166	0	1	0	0	242	0	1	1	0
5	250	0	0	0	0	175	1	1	0	0	250	0	1	1	0
6	246	1	0	0	1	231	0	0	0	0	246	1	0	0	0
7	254	0	0	0	0	239	1	0	0	0	254	1	1	1	0
8	241	1	0	0	1	151	0	1	0	0	241	1	0	0	0
9	249	1	0	0	1	159	1	1	0	0	249	1	0	0	0
10	208	1	0	0	0	133	0	0	0	1	208	0	0	0	0
11	216	1	0	0	0	141	1	0	0	1	216	0	0	0	0
12	212	1	0	0	0	197	0	1	0	1	212	0	0	0	0
13	220	1	0	0	0	205	1	1	0	1	220	0	0	0	0
14	210	1	0	0	0	165	0	0	0	1	210	1	0	0	0
15	218	1	0	0	0	173	1	0	0	1	218	1	0	0	0
16	214	1	0	0	0	229	0	1	0	1	214	1	0	0	0
17	222	1	0	0	0	137	1	1	0	1	222	1	0	0	0
18	209	0	0	0	0	149	0	0	0	1	209	0	1	1	0
19	217	0	0	0	0	157	1	0	0	1	217	0	1	1	0
20	224	0	0	0	0	134	0	1	0	1	176	0	1	1	0
21	232	0	0	0	0	142	1	1	0	1	184	0	1	1	0
22	228	0	0	0	0	198	0	0	0	1	180	1	1	1	0
23	236	0	0	0	0	206	1	0	0	1	188	1	1	1	0
24	226	0	0	0	0	166	0	1	0	1	178	1	1	1	0
25	234	0	0	0	0	174	1	1	0	1	186	1	1	1	0
26	230	0	0	0	1	230	0	0	0	1	182	0	1	1	0
27	238	0	0	1	0	238	0	0	0	0	190	0	1	1	0
28	225	0	0	1	0	134	1	0	0	0	177	0	1	1	0
29	233	1	1	1	1	158	1	1	1	1	185	1	1	1	1

CHANNEL		PROM I				PROM II					PROM III				
Receiver	ADR	M4	M2	M1	A32	ADR	A4	A8	A2	A64	ADR	A16	Simpl	M8	BL
60	160	1	1	1	0	130	1	1	1	1	160	1	1	0	0
61	168	1	1	1	1	138	0	0	1	1	168	0	1	0	0
62	164	0	0	0	0	194	0	0	1	0	164	0	1	1	0
63	172	0	0	0	0	202	1	0	1	0	172	0	1	1	0
64	162	0	0	0	0	162	0	1	1	0	162	0	1	1	0
65	170	0	0	0	0	170	1	1	1	0	170	0	1	1	0
66	166	0	0	0	0	226	0	0	1	0	166	1	1	1	0
67	174	1	0	0	1	234	1	0	1	0	174	1	0	0	0
68	161	1	0	0	1	146	0	1	1	0	161	1	0	0	0
69	169	1	0	0	1	154	1	1	1	0	169	1	0	0	0
70	128	1	0	0	0	128	0	0	1	1	128	0	0	0	0
71	136	1	0	0	0	136	1	0	1	1	136	0	0	0	0
72	132	1	0	0	0	192	0	1	1	1	132	0	0	0	0
73	140	1	0	0	0	200	1	1	1	1	140	0	0	0	0
74	130	1	0	0	0	160	0	0	1	1	130	1	0	0	0
75	138	1	1	1	1	168	1	1	1	1	138	1	1	1	1
76	134	1	1	1	1	224	1	1	1	1	134	1	1	1	1
77	142	1	0	0	0	232	1	1	1	1	142	1	0	0	0
78	129	0	0	0	0	144	0	0	1	1	129	0	1	1	0
79	137	0	0	0	0	152	1	0	1	1	137	0	1	1	0
80	176	0	0	0	0	131	0	1	0	1	224	0	1	1	0
81	184	0	0	0	0	139	1	1	0	1	232	0	1	1	0
82	180	0	0	0	0	195	0	0	0	1	228	1	1	1	0
83	188	0	0	0	0	203	1	0	0	1	236	1	1	1	0
84	178	0	0	0	0	163	0	1	0	1	226	1	1	1	0
85	186	0	0	0	0	171	1	1	0	1	234	1	1	1	0
86	182	0	0	0	1	227	0	0	0	1	230	0	1	1	0
87	190	0	0	1	0	235	0	0	0	0	238	0	1	1	0
88	177	0	0	1	0	147	1	0	0	0	225	0	1	1	0
89	185	1	1	1	1	155	1	1	1	1	233	1	1	1	1

P0	144	1	1	1	1	129	1	1	1	1	192	1	1	1	1
P1	152	1	1	1	1	137	1	1	1	1	200	1	1	1	1
P2	148	1	1	1	1	193	1	1	1	1	196	1	1	1	1
P3	156	1	1	1	1	201	1	1	1	1	204	1	1	1	1
P4	146	1	1	1	1	161	1	1	1	1	194	1	1	1	1
P5	154	1	1	1	1	169	1	1	1	1	202	1	1	1	1
P6	150	1	1	1	1	225	1	1	1	1	198	1	1	1	1
P7	158	1	1	1	1	233	1	1	1	1	206	1	1	1	1
P8	145	1	1	1	1	145	1	1	1	1	193	1	1	1	1
P9	153	1	1	1	1	153	1	1	1	1	201	1	1	1	1

16RA	143	1	0	0	0	248	0	1	0	1	143	1	0	0	0
------	-----	---	---	---	---	-----	---	---	---	---	-----	---	---	---	---

CHANNEL		PROM I				PROM II					PROM III				
Transmit	ADR	M4	M2	M1	A32	ADR	A4	A8	A2	A64	ADR	A16	RP	M8	BL
0	112	1	1	1	1	7	1	1	1	1	112	1	1	1	1
1	120	1	0	0	0	15	1	0	0	1	120	1	1	1	0
2	116	1	0	0	0	71	0	1	0	1	116	1	1	1	0
3	124	1	0	0	0	79	1	1	0	1	124	1	1	1	0
4	114	1	0	0	1	39	0	0	0	1	114	0	1	1	0
5	112	1	0	1	0	47	0	0	0	0	122	0	1	1	0
6	118	1	0	1	0	103	1	0	0	0	118	0	1	1	0
7	126	1	0	1	0	111	0	1	0	0	126	0	1	1	0
8	113	1	0	1	0	23	1	1	0	0	113	0	1	1	0
9	121	1	0	1	0	31	0	0	0	0	121	1	1	1	0
10	80	1	0	1	0	5	1	0	0	0	80	1	1	1	0
11	88	1	0	1	0	13	0	1	0	0	88	1	1	1	0
12	84	1	0	1	0	69	1	1	0	0	84	1	1	1	0
13	92	1	0	1	1	77	0	0	0	0	92	0	1	1	0
14	82	1	0	1	1	37	1	0	0	0	82	0	1	1	0
15	90	1	0	1	1	45	0	1	0	0	90	0	1	1	0
16	86	1	0	1	1	101	1	1	0	0	86	0	1	1	0
17	94	1	0	1	1	109	0	0	0	0	94	1	1	1	0
18	81	1	0	1	1	21	1	0	0	0	81	1	1	1	0
19	89	1	0	1	1	29	0	1	0	0	89	1	1	1	0
20	96	1	0	1	1	6	1	1	0	0	48	1	1	1	0
21	104	1	0	1	0	14	0	0	0	1	56	0	1	1	0
22	100	1	0	1	0	70	1	0	0	1	52	0	1	1	0
23	108	1	0	1	0	78	0	1	0	1	60	0	1	1	0
24	98	1	0	1	0	38	1	1	0	1	50	0	1	1	0
25	106	1	0	1	0	46	0	0	0	1	58	1	1	1	0
26	102	1	0	1	0	102	1	0	0	1	54	1	1	1	0
27	110	1	0	1	0	110	0	1	0	1	62	1	1	1	0
28	97	1	0	1	0	6	1	1	0	1	49	1	1	1	0
29	105	1	1	1	1	30	1	1	1	1	57	1	1	1	1

CHANNEL		PROM I				PROM II					PROM III				
Transmit	ADR	M4	M2	M1	A32	ADR	A4	A8	A2	A64	ADR	A16	RP	M8	BL
60	32	1	0	0	0	2	0	0	1	1	32	1	1	1	0
61	40	1	0	0	0	10	1	0	1	1	40	1	1	1	0
62	36	1	0	0	0	66	0	1	1	0	36	1	1	1	0
63	44	1	0	0	0	74	1	1	1	0	44	1	1	1	0
64	34	1	0	0	1	34	0	0	1	0	34	0	1	1	0
65	42	1	0	1	0	42	0	0	1	0	42	0	1	1	0
66	38	1	0	1	0	98	1	0	1	0	38	0	1	1	0
67	46	1	0	1	0	106	0	1	1	0	46	0	1	1	0
68	33	1	0	1	0	18	1	1	1	0	33	0	1	1	0
69	41	1	0	1	0	26	0	0	1	0	41	1	1	1	0
70	00	1	0	1	0	00	1	0	1	1	0	1	1	1	0
71	8	1	0	1	0	8	0	1	1	1	8	1	1	1	0
72	4	1	0	1	0	64	1	1	1	1	4	1	1	1	0
73	12	1	0	1	1	72	0	0	1	1	12	0	1	1	0
74	2	1	0	1	1	32	1	0	1	1	2	0	1	1	0
75	10	1	1	1	1	40	1	1	1	1	10	1	1	1	1
76	6	1	1	1	1	96	1	1	1	1	6	1	1	1	1
77	14	1	0	1	1	104	0	0	1	1	14	1	1	1	0
78	1	1	0	1	1	16	1	0	1	1	1	1	1	1	0
79	9	1	0	1	1	24	0	1	1	1	9	1	1	1	0
80	48	1	0	1	1	3	1	1	1	1	96	1	1	1	0
81	56	1	0	1	0	11	0	0	1	1	104	0	1	1	0
82	52	1	0	1	0	67	1	0	1	1	100	0	1	1	0
83	60	1	0	1	0	75	0	1	1	1	108	0	1	1	0
84	50	1	0	1	0	35	1	1	1	1	98	0	1	1	0
85	58	1	0	1	0	43	0	0	1	1	106	1	1	1	0
86	54	1	0	1	0	99	1	0	1	1	102	1	1	1	0
87	62	1	0	1	0	107	0	1	1	0	110	1	1	1	0
88	49	1	0	1	0	19	0	1	1	0	97	1	1	1	0
89	57	1	1	1	1	27	1	1	1	1	105	1	1	1	1
P0	16	1	1	1	1	1	1	1	1	1	64	1	1	1	1
P1	24	1	1	1	1	9	1	1	1	1	72	1	1	1	1
P2	20	1	1	1	1	65	1	1	1	1	68	1	1	1	1
P3	28	1	1	1	1	73	1	1	1	1	76	1	1	1	1
P4	18	1	1	1	1	33	1	1	1	1	66	1	1	1	1
P5	26	1	1	1	1	41	1	1	1	1	74	1	1	1	1
P6	22	1	1	1	1	97	1	1	1	1	70	1	1	1	1
P7	30	1	1	1	1	105	1	1	1	1	78	1	1	1	1
P8	17	1	1	1	1	17	1	1	1	1	65	1	1	1	1
P9	25	1	1	1	1	25	1	1	1	1	73	1	1	1	1

16TA	15	1	0	1	1	120	1	1	0	0	15	0	1	1	0
------	----	---	---	---	---	-----	---	---	---	---	----	---	---	---	---

9. ALIGNMENT

9.1 ALIGNMENT OF VCO

Necessary measuring equipment:

Voltmeter and RF probe or RF voltmeter.

Check supply voltage 13.2 V.

Check output from 5V and 10V (9.5V) regulators.

Connect voltmeter to TP3 - VCO - DC (receiverboard).

Select CH88 162.025 MHz VCO 151.325 MHz highest. RX frequency.

Adjust C63 to TP3 = 7.5 volt.

Key the transmitter CH88 157.425 MHz.

Check voltage in TP3 to be 4-6 V.

Select CH6 156.300 MHz VCO 145.600 MHz lowest. RX frequency.

Check voltage in TP3 to be 1.5-2.5 V.

Connect voltmeter with RF probe to output of L18 (RF-input on synthesizer).

Select CH88.

Adjust L16, L18 to max. output - minimum 400 mV RMS.

Check the voltage in TP3 again 7.5 V.

NB: When installing private channels, check that VCO-DC never exceed 1-8 VDC.

9.2 ALIGNMENT OF CHANNEL FREQUENCY

Necessary measuring equipment:

Frequency counter.

50 ohm dummy load.

Connect frequency counter to the dummy load.

Select CH18 and key the transmitter LOW POWER.

Adjust C5 in 6.4 MHz oscillator Synthesizer module (through hole in AF board).

Frequency must be 156.900.0 Mhz \pm 100 Hz.

9.3 ALIGNMENT OF RECEIVER RF AND IF.

Necessary measuring equipment:

Signal generator.

Distortion meter.

Oscilloscope.

Select CH18 161.500 MHz (VCO = 150.800 MHz).

Connect distortion meter across the loudspeaker terminals.

Connect signal generator to the antenna connector and tune it to 161.500.0 MHz modulated with 1 KHz \pm 3 KHz deviation.

Connect oscilloscope to TP1, frequency 455 MHz and sensitivity 0.1 V/cm.

Use a non-loading test probe.

Increase the signal generator output until you see a signal in TP1.

Tune L9, L8, L7, L6, L5, L4, L3, L2 and L1 to max. signal in TP1.

If the signal in TP1 exceeds 500 mV pp, the signal generator output must be reduced.

L5 and L7 are tuned to minimum distortion of the loudspeaker output.

Be sure that the generator still is exactly on the frequency.

L10 is tuned to max. signal in the loudspeaker.

L6 is tuned 1 turn down (clockwise).

The sensitivity at 12 dB SINAD or S/N must be better than 0.4 μ V (0.8 μ V EMF).

Select CH11 156.550 MHz (VCO = 145.850 MHz).

Tune P1 to best sensitivity. At 12 dB SINAD or S/N the sensitivity must be better than 0.4 μ V (0.8 μ V EMF).

9.4 ALIGNMENT OF TX-DRIVER.

Necessary measuring equipment:

Voltmeter and RF probe or a watt-meter.

Connect a 47 ohms resistor or watt-meter to the Tx-driver output and measure the voltage or power.

Select CH18 (156.900 Mhz) and key the transmitter.

Tune L15, C47 and L12 to max. output minimum 3 V/ 50 ohms - 180 mW.

9.5 ALIGNMENT OF VHF-PA.

Necessary measuring equipment:

VHF power meter.

Connect the power meter to the antenna connector.

Select CH18 (156.900 MHz).

At 10.8 V supply voltage tune C21 and C10 to max. output power.

At 15.0 V supply voltage adjust output power to 25 W with P2 on receiver module.

Output power must be 20W \pm 2W at 12.0 V supply voltage.

Normal drive in MFR 238 gives a transmitcurrent for the total set at 4-4.5 A.

Switch to reduced power.

Output must be 0.5W-1W.

This can be adjusted by changing R89 on AF module.

9.6 ALIGNMENT OF MODULATOR.

Necessary measuring equipment:

Tone generator.

Oscilloscope.

Deviation meter.

50 ohm dummy load.

Select CH18 and key transmitter on LOW POWER.

Connect deviation meter to the dummy load.

Connect tone generator to the microphone terminals.

Input 1 KHz 100 mV pp (35 mV RMS) on the terminal.

Turn P6 in middle position.

Check the compressor function. Signal in TP1 must be 2-5 V.

Adjust P5 to a deviation on \pm 4.5 KHz.

Reduce tone generator input to 3.5 mV RMS on the terminals.

Adjust P6 to a deviation on \pm 3 KHz.

P6 can be readjusted to the actual microphone level.

Check that the max. deviation still is \pm 4.5 KHz when the receiver module is locked in the correct position and the TX-power is on maximum.

9.7 ALIGNMENT OF RECEIVER - AF AND SQ.

Necessary measuring equipment:

Signal generator.

Oscilloscope.

Select CH16 156.800 MHz.

1 KHz mod. \pm 3 KHz dev. 1 mV ant.

Adjust P3 to a telephone level of 600 mVpp.

Disconnect the signal generator.

Set SQ potm. in center position.

Adjust P2 to threshold level.

9.8. ALIGNMENT AND CODING OF SELCALL.

Necessary measuring equipment:

AF generator.
Frequency counter.
RF generator.
Oscilloscope.

Adjust the AF generator using a frequency counter to the first tone in the code.

Connect the AF generator to the modulation input of the RF generator - CH16 deviation ± 1 KHz.

Short circuit pin 15-16 IC1.


Connect oscilloscope to TP1 and adjust L1 to maximum signal.

Disconnect the short circuit pin 15-16 IC1.

Connect oscilloscope to TP3.

Time of high level 12-15 m sec. determined by R4.

Time of low level 210-290 m sec. determined by R8.

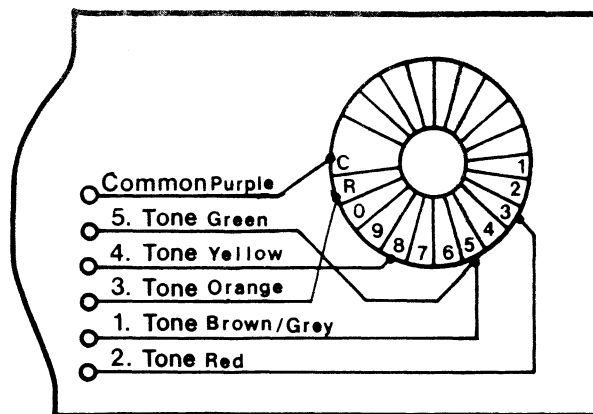

THE CODE ON THE LAYOUT DRAWING IS :

53R85 = 53385


Tone Frequency

1	1124 Hz	4	1358 Hz	8	1747 Hz
2	1197 Hz	5	1446 Hz	9	1860 Hz
3	1275 Hz	6	1540 Hz	0	1981 Hz
		7	1640 Hz	R	2110 Hz

10. OPTIONS


10.1. 24V REGULATOR

RS 24/12V

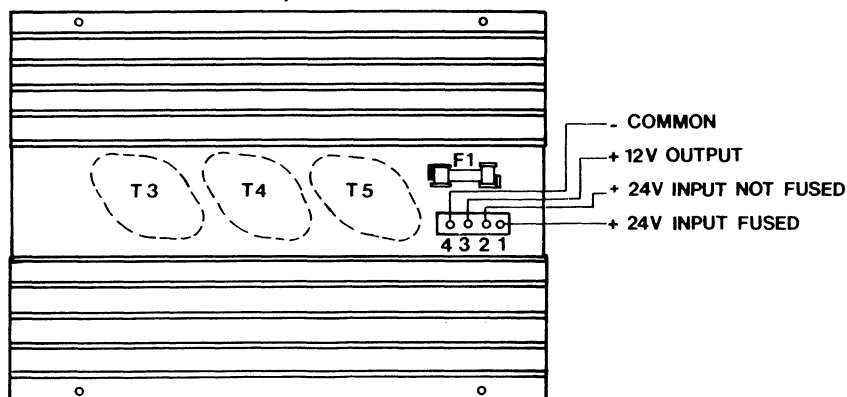


10.2. 220V REGULATOR


RS 220/12V

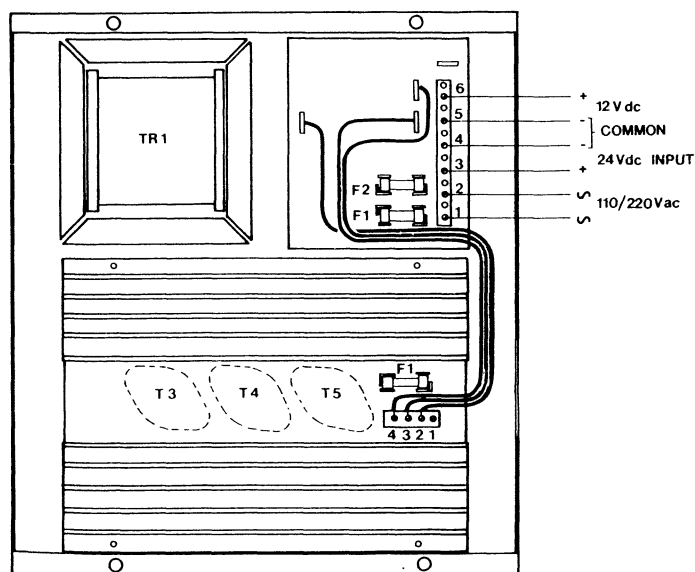


10.3. SELCALL

TEST ON/OFF SWITCH
FOR SELCALL

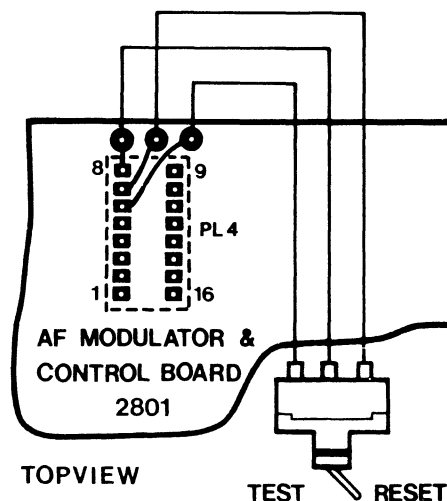

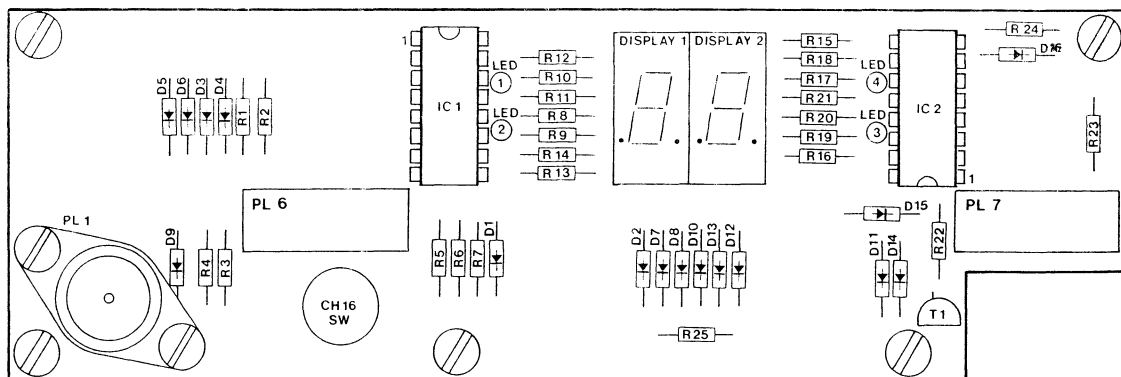

DISPLAY 2805 C
DRAWING No. 80.2805

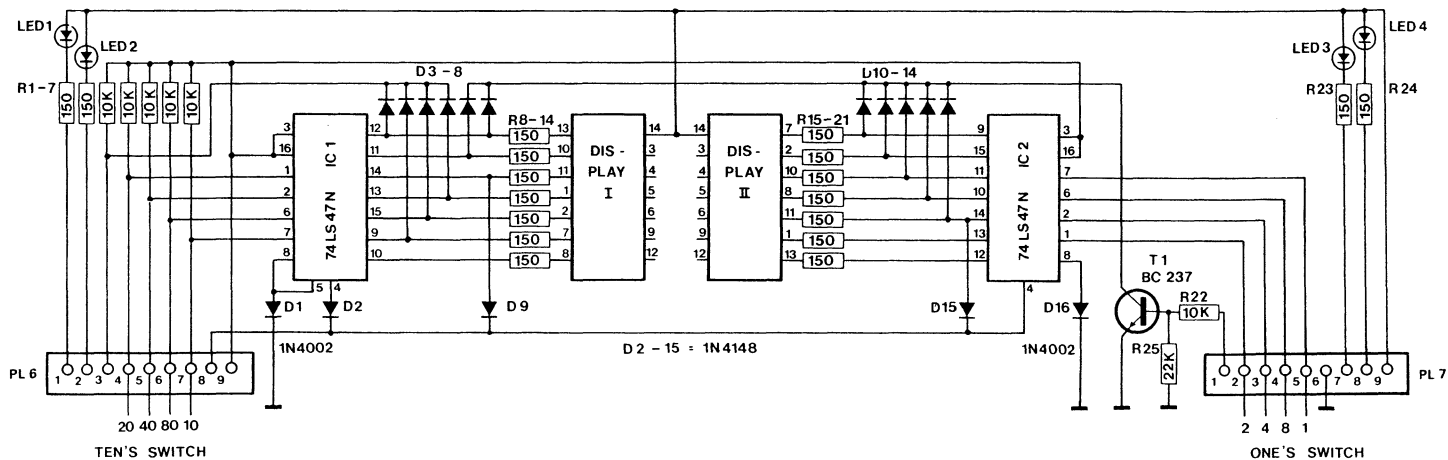

BC 237

1N4002

1N4148

LED


PL 1

DISPLAY

OUTPUTS

74 LS 47N

DISPLAY CIRCUIT 2805
DIAGRAM No. 92.7035

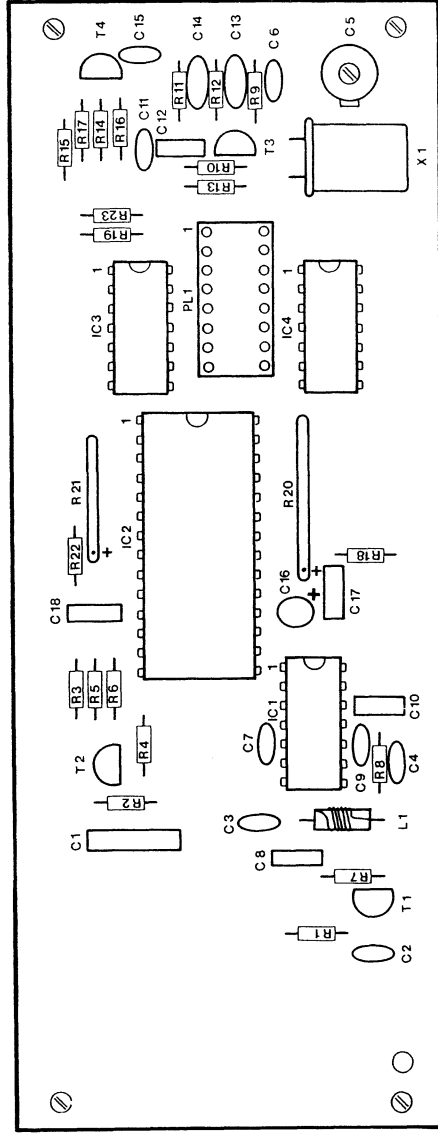

SYNTHESIZER 2787B
DRAWING NO. 80.2787


REFERENCE OSC.

AMPLIFIER

PROGRAMMABLE COUNTER


PL 1

DC - VCO

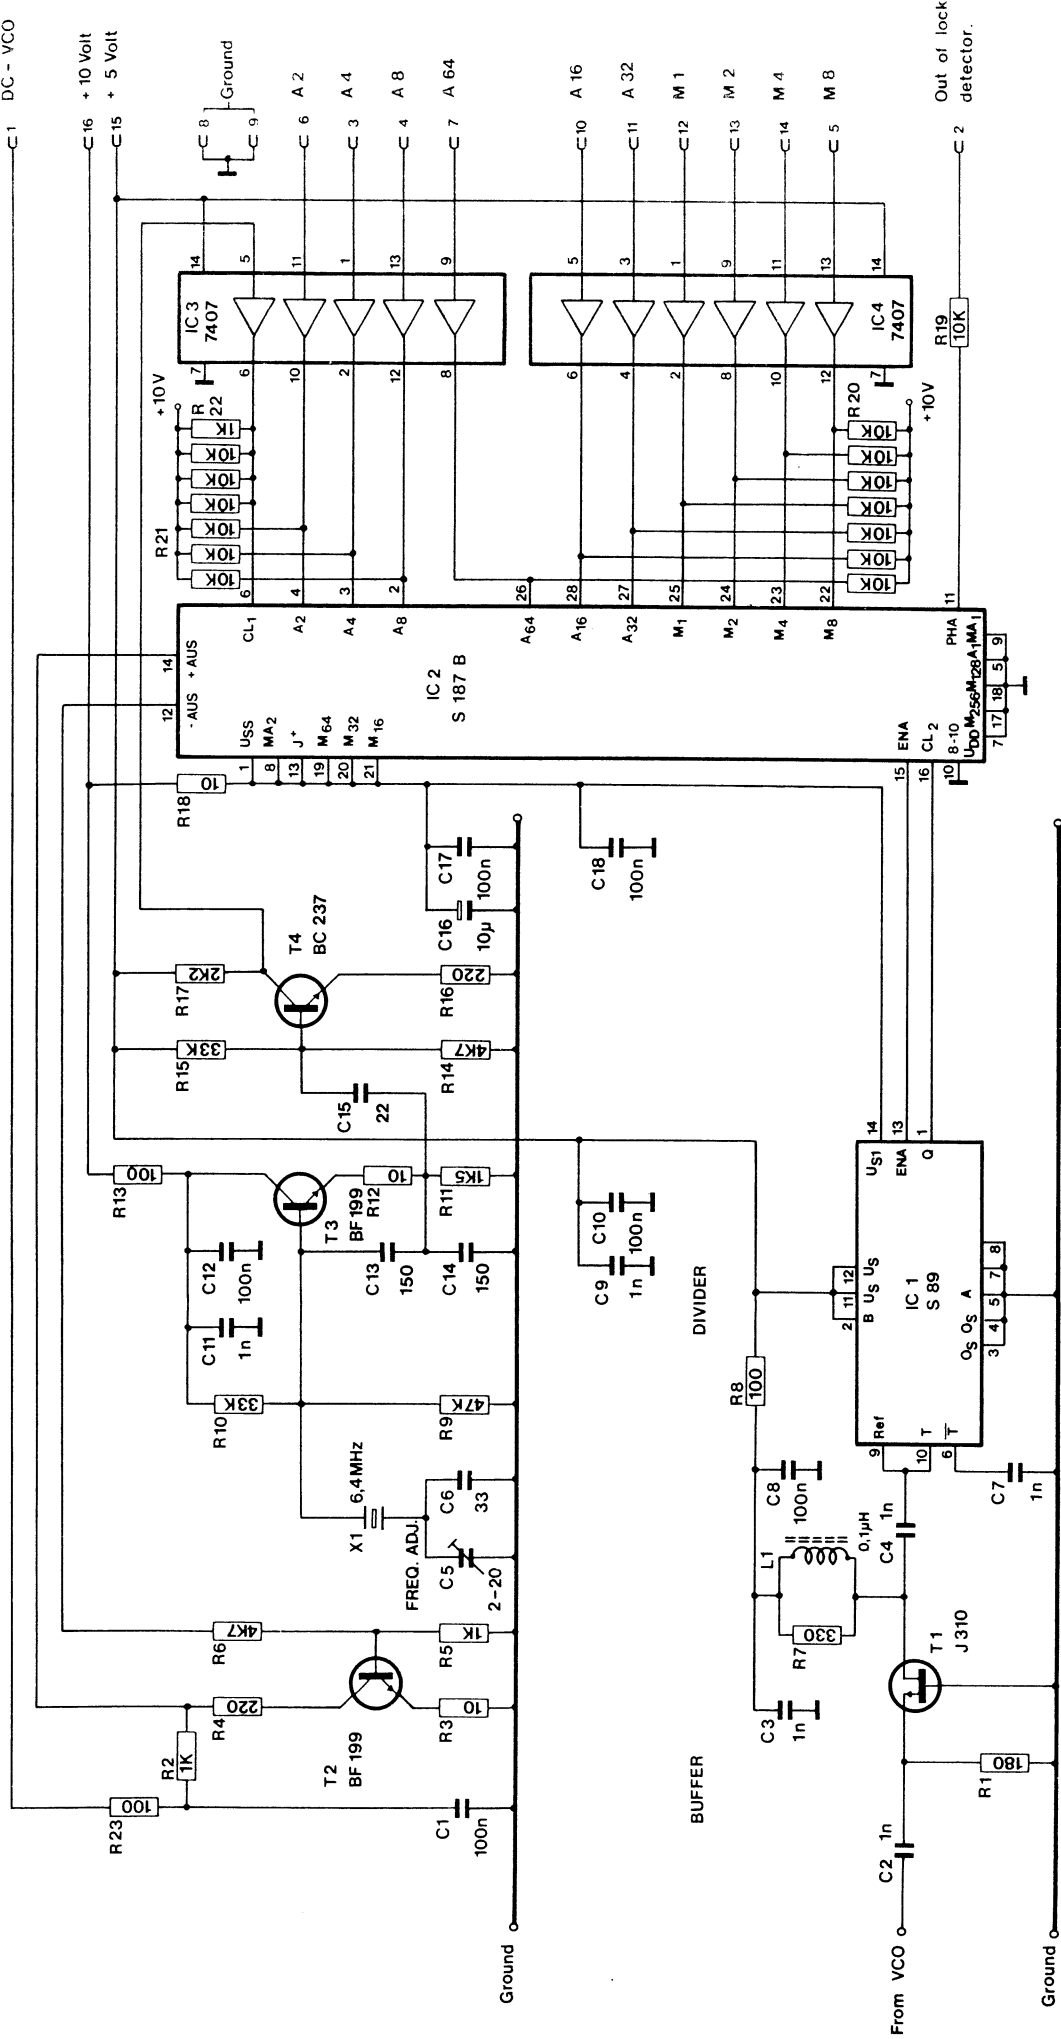


BF 199 BC 237 J 310


SYNTHESIZER 2787 B
 DIAGRAM No. 92.7030

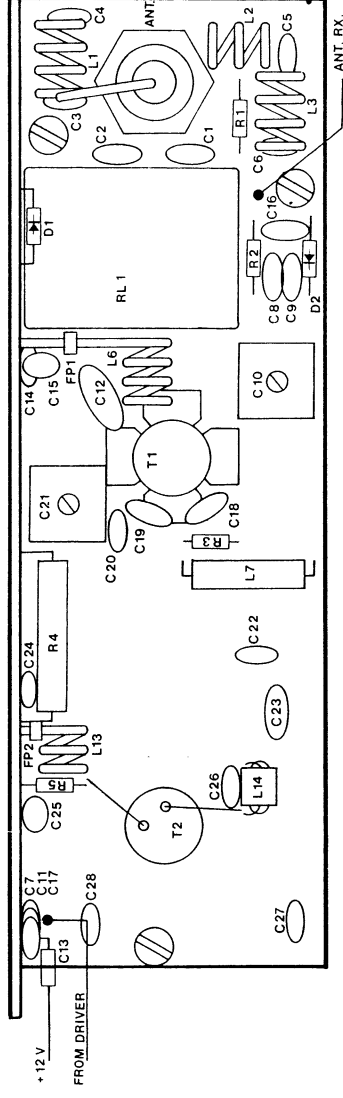


VHF PA. 2728 B & 2729 A
DRAWING No. 80.2729

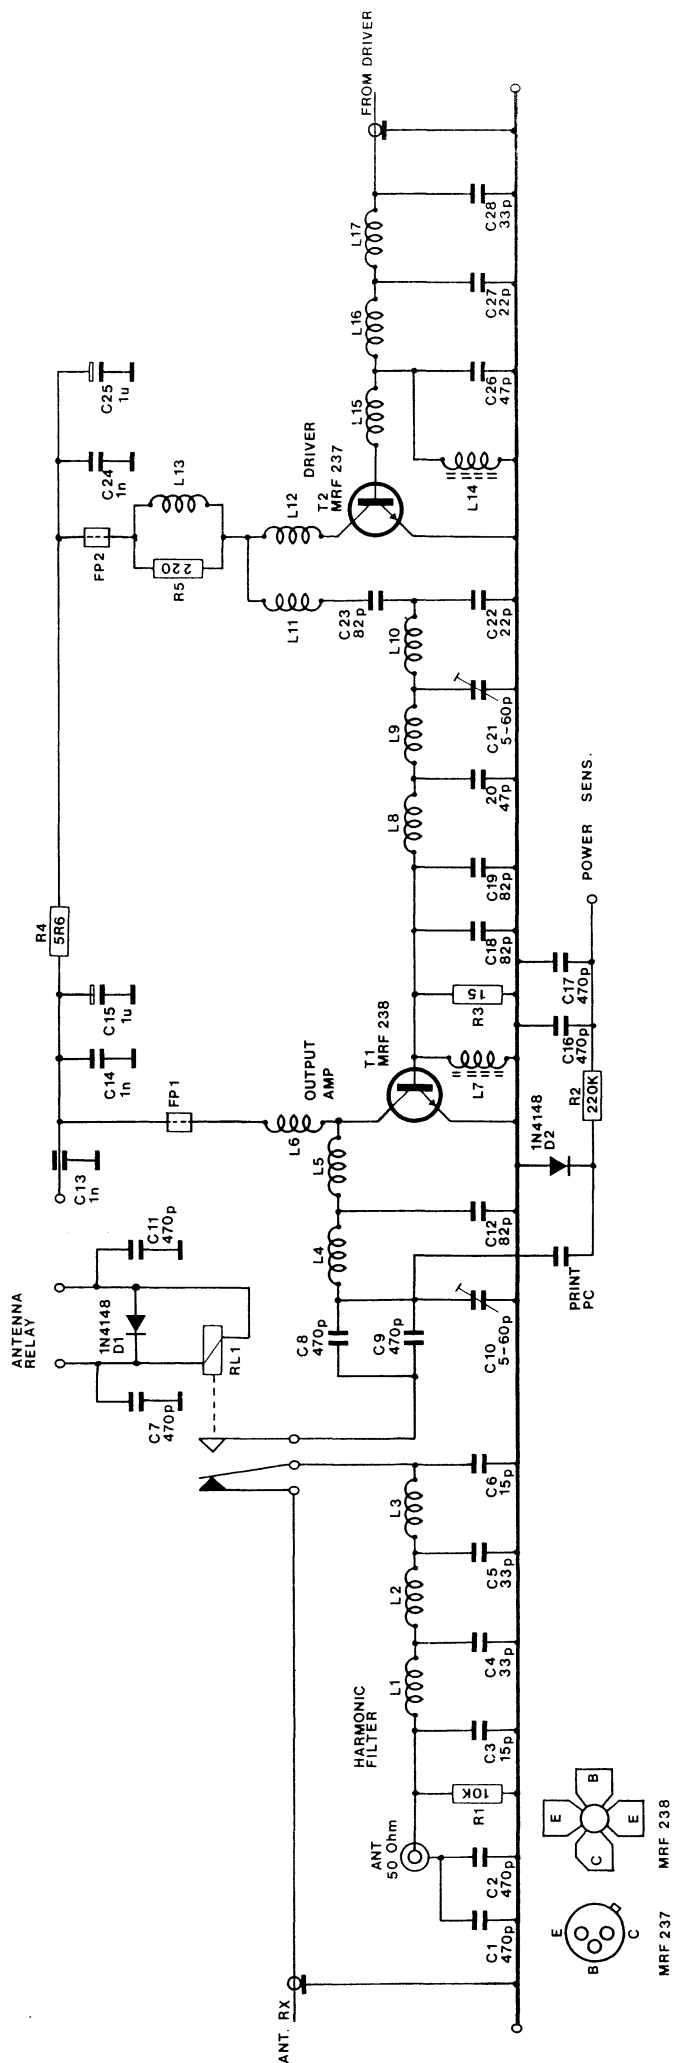

2728B
VHF. PA. 2729A
 DIAGRAM No. 92.7032

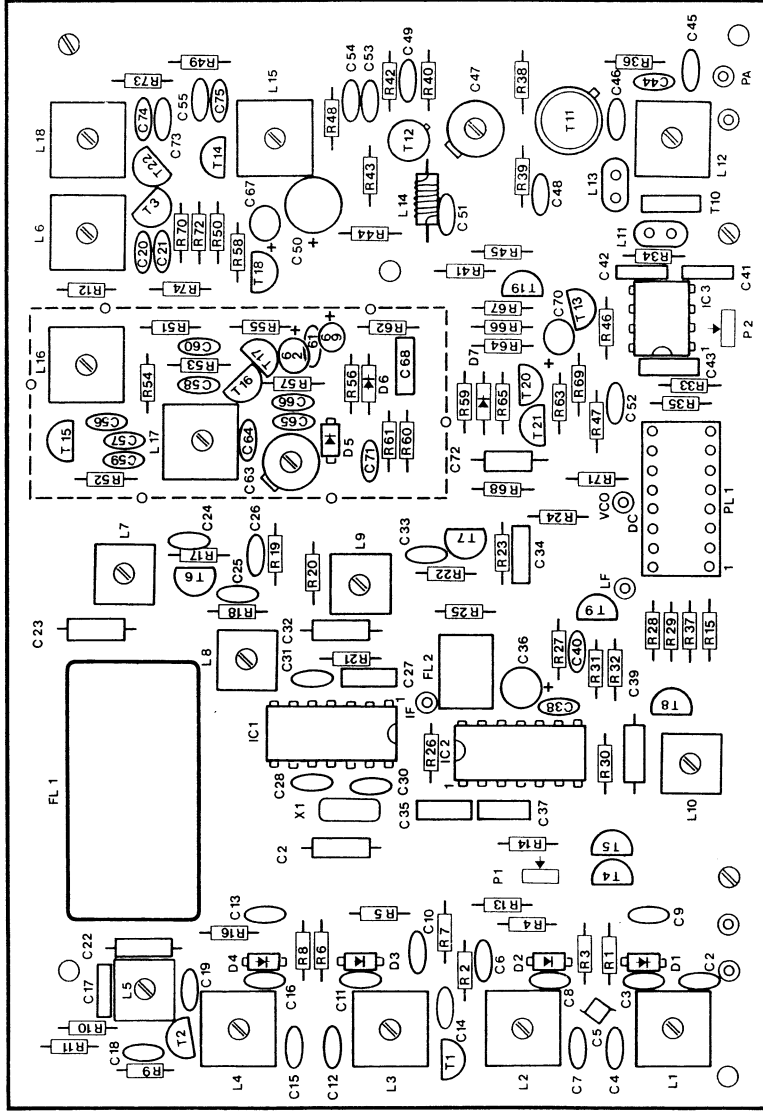


RECEIVER, DRIVER & VCO 2793C
DRAWING No. 80.2793

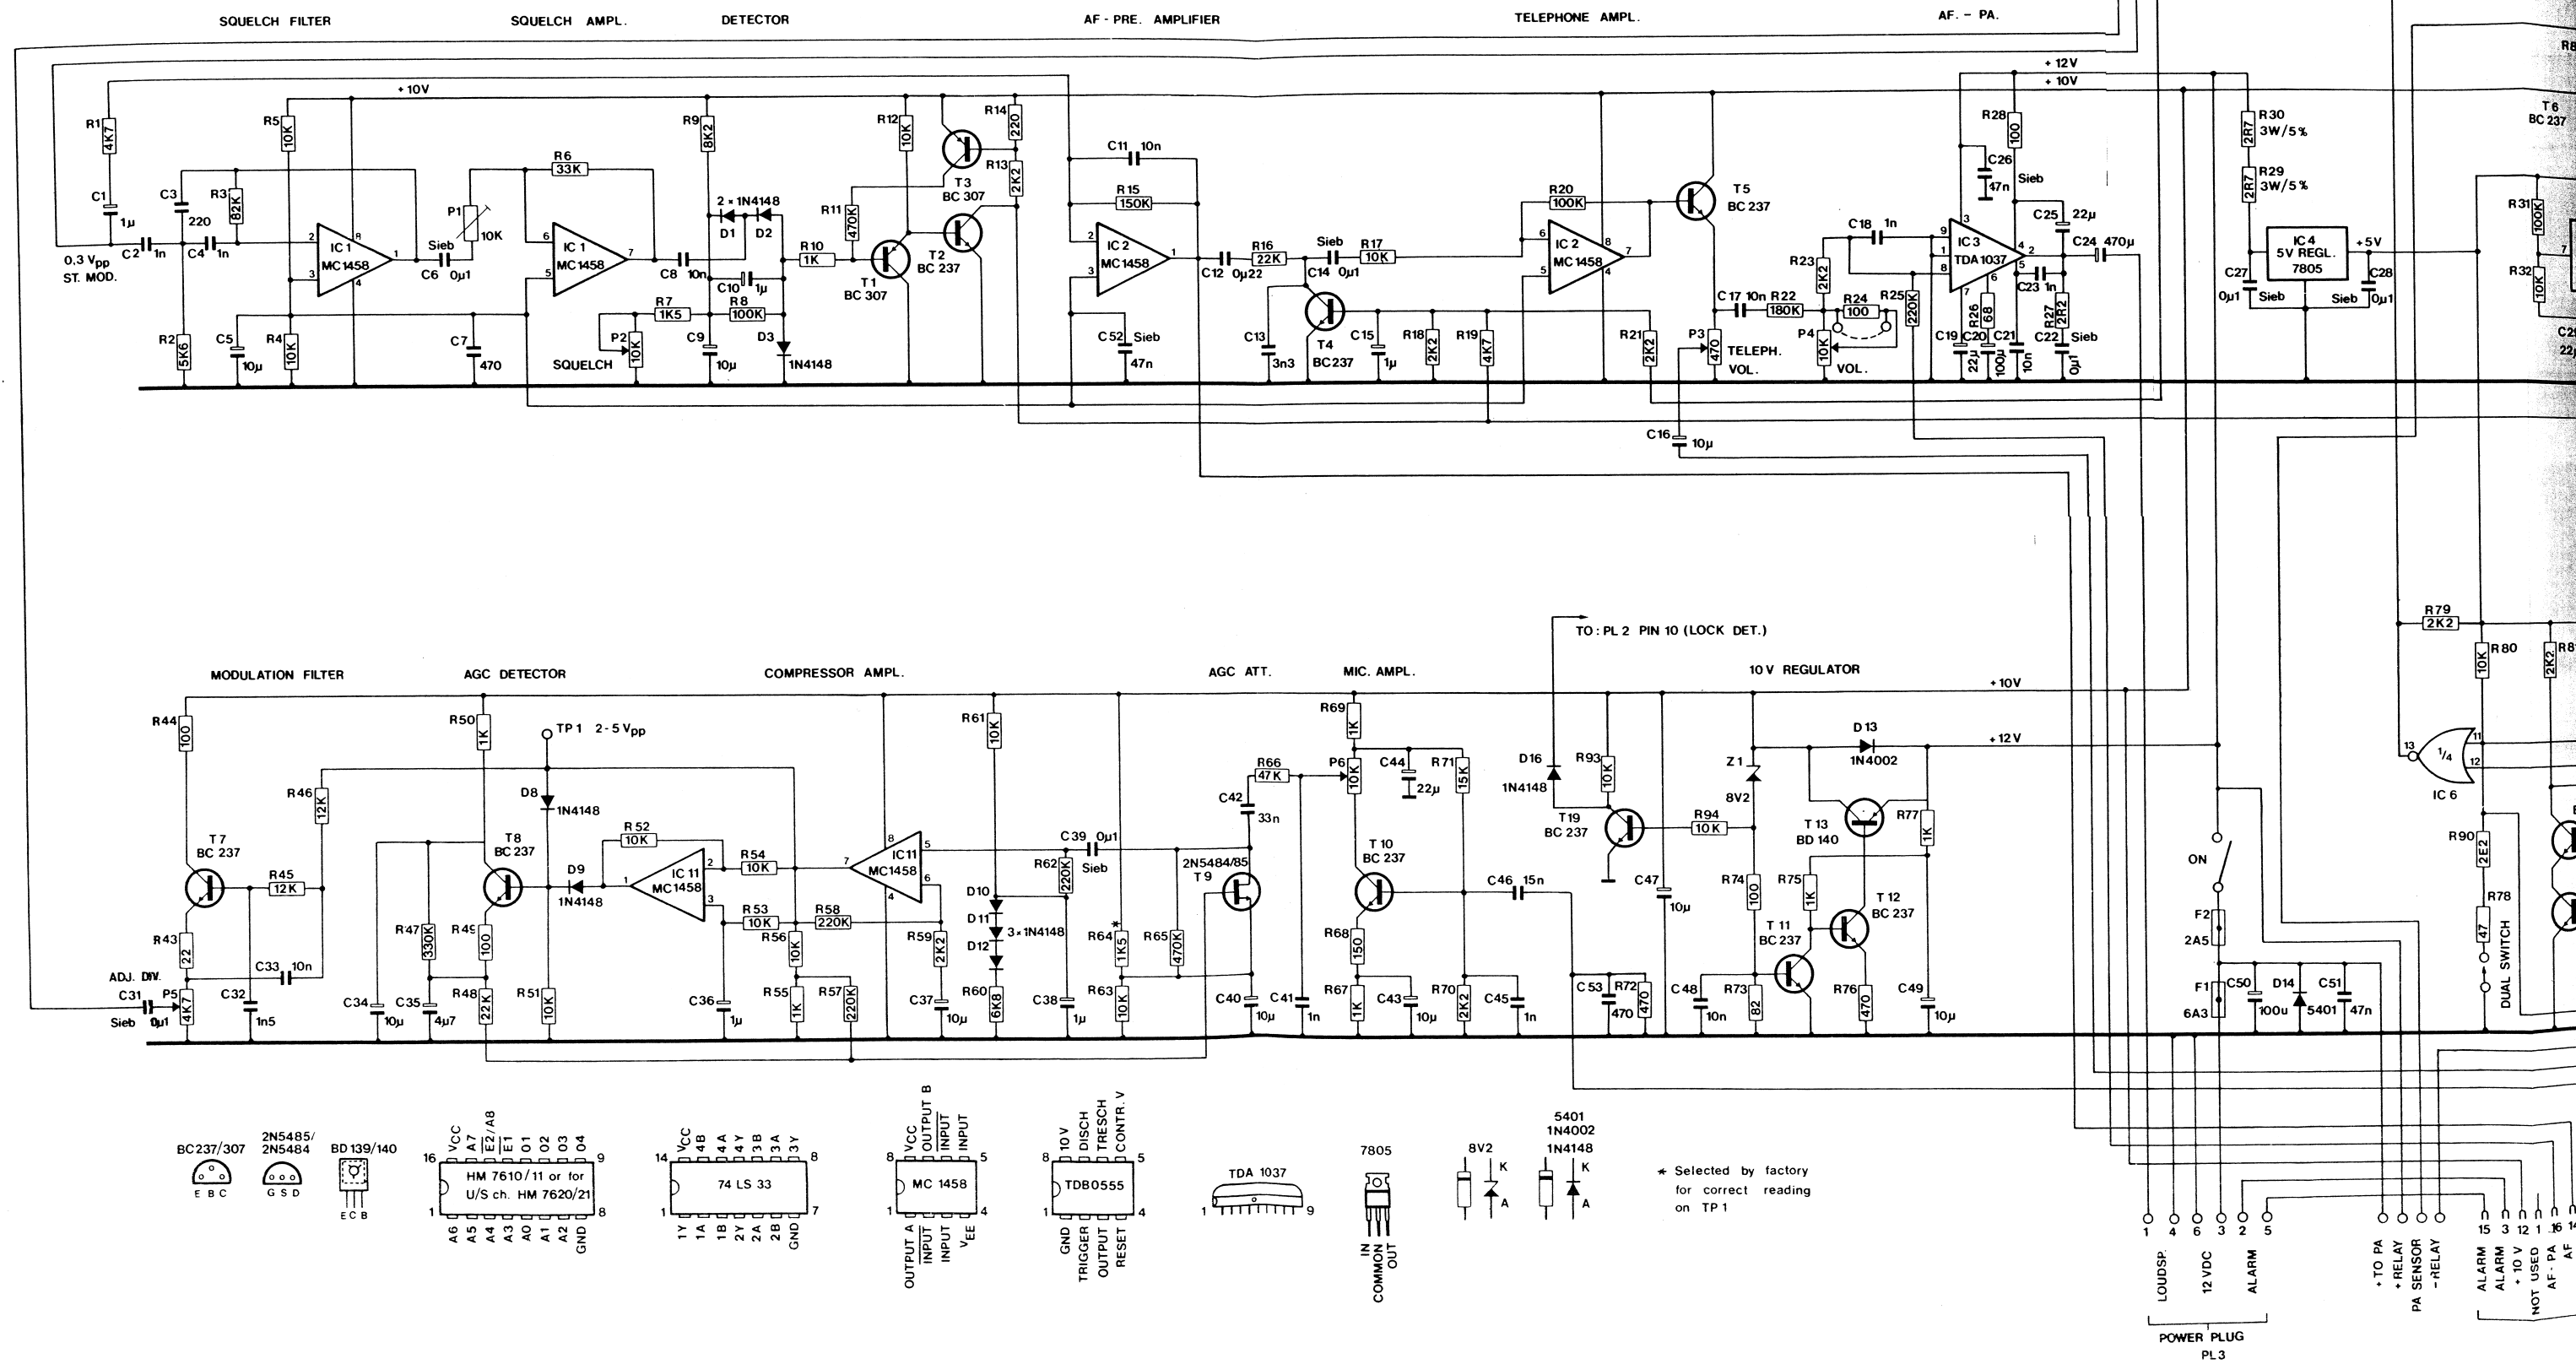


NOT USED
3 4 5 6 7 8 11
U U U U U U U

POWER PLUG
PL 3
1 2 3 4 5 6 7 8 9 10 11 12 13 14
LOU DSP
12 VDC
ALARM
+ TO PA
+ RELAY
PA SENSOR
- RELAY
ALARM
ALARM
+ 10 V
NOT USED
AF - PA
AF - AF

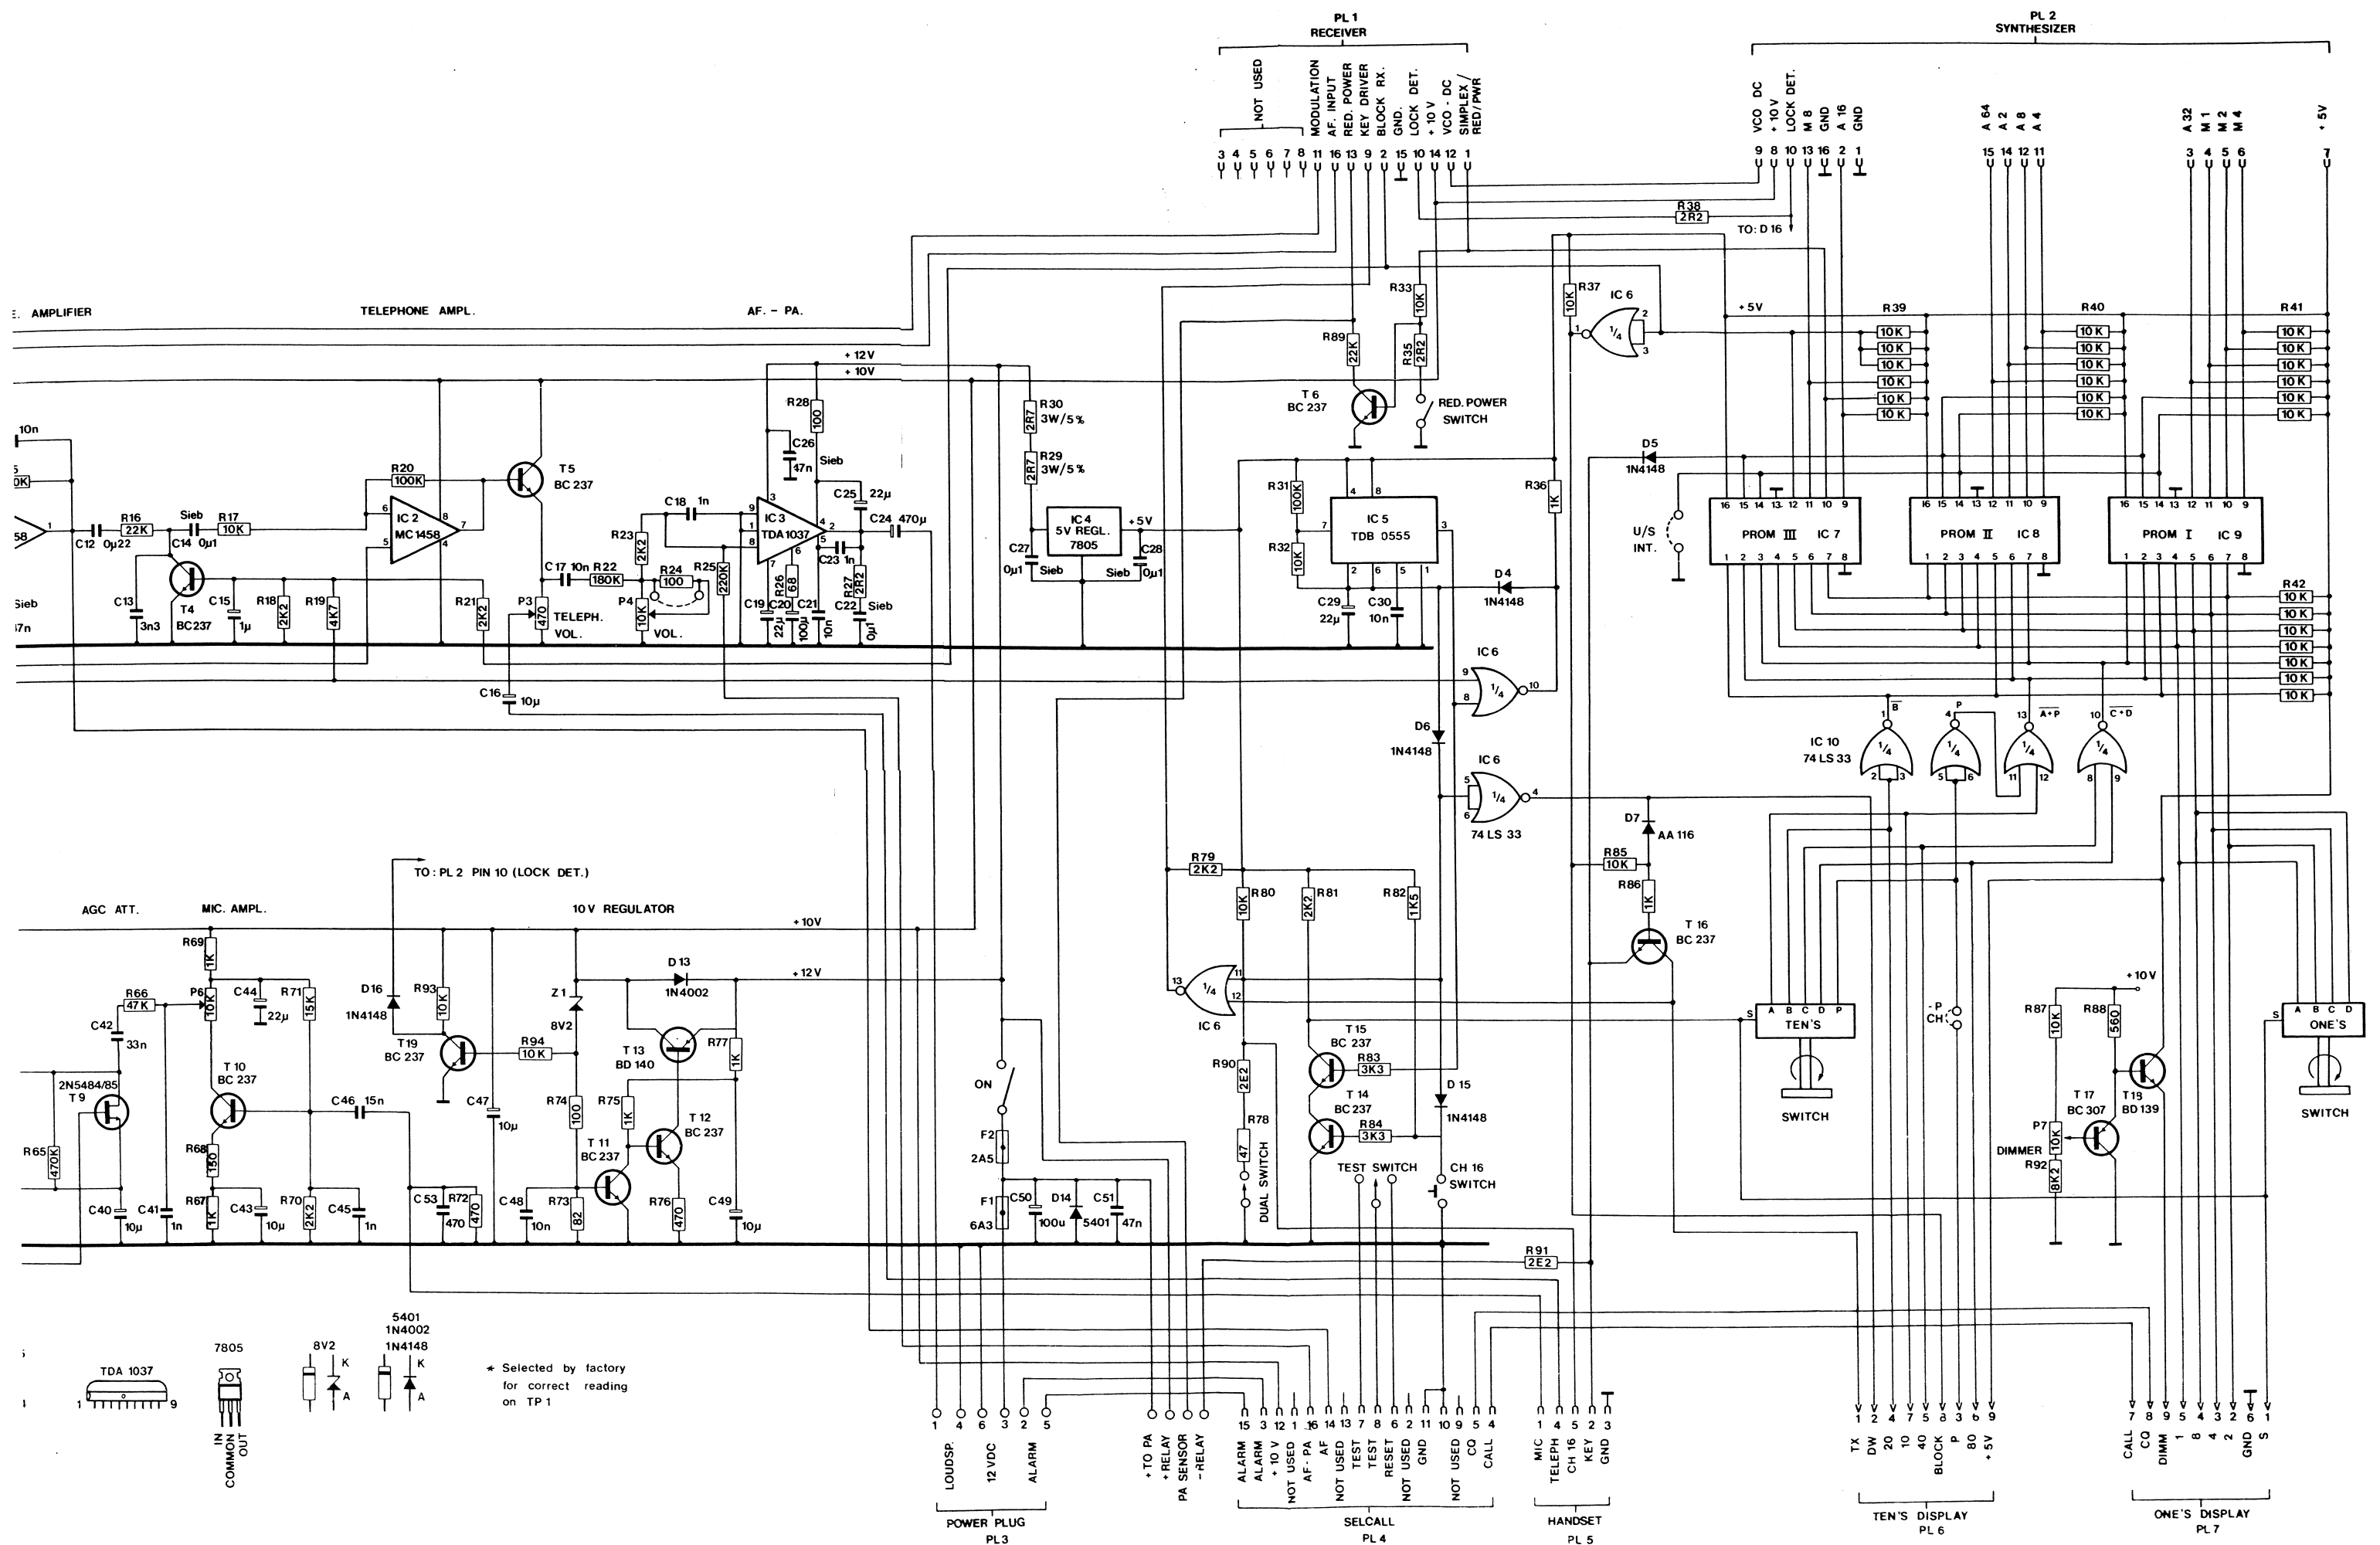


AF MODULATOR & CONTROL BOARD 28011
 DIAGRAM No. 92.7034
 870302




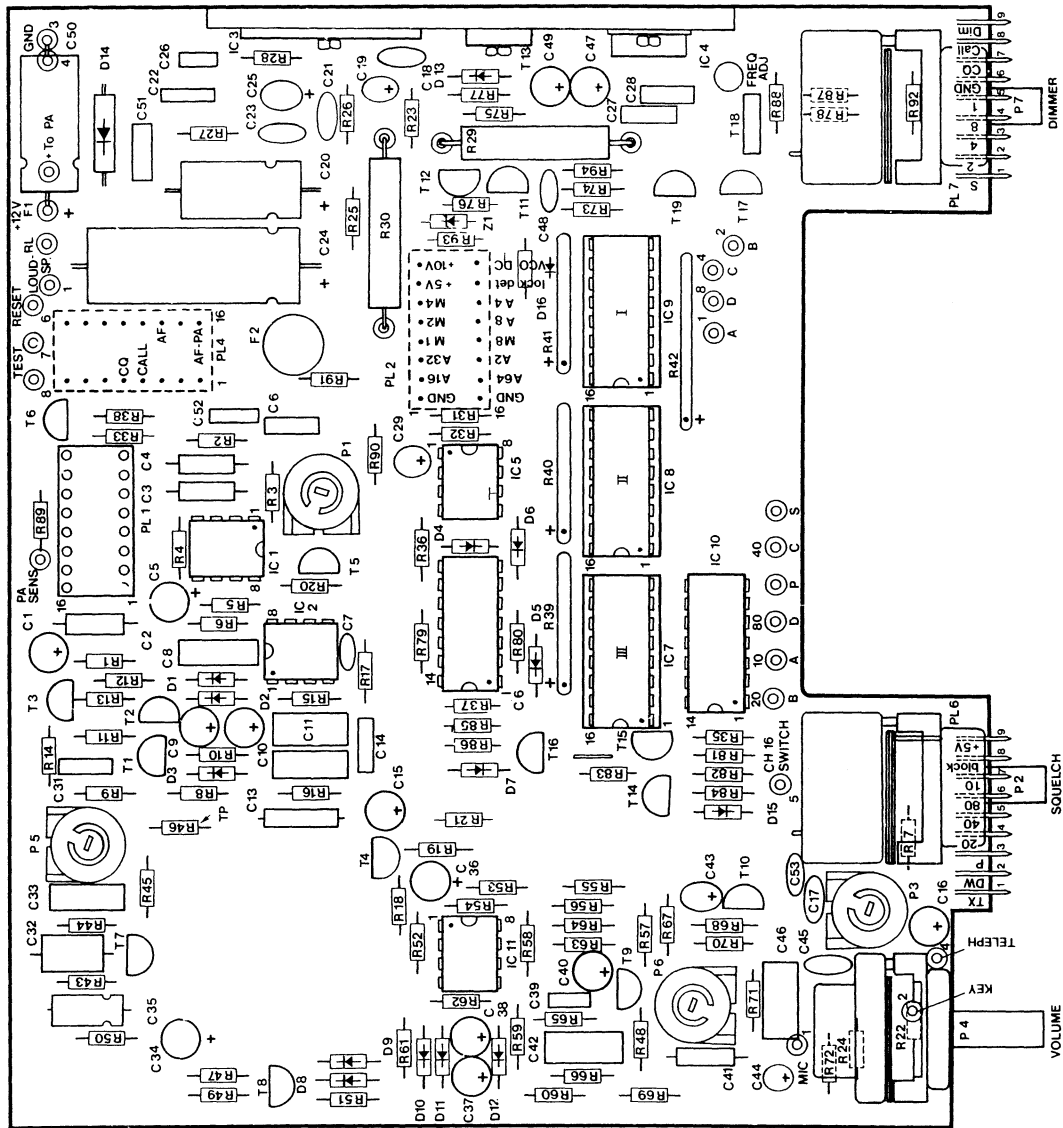


AF MODULATOR & CONTROL BOARD 28011
DRAWING No. 80.2801
860131

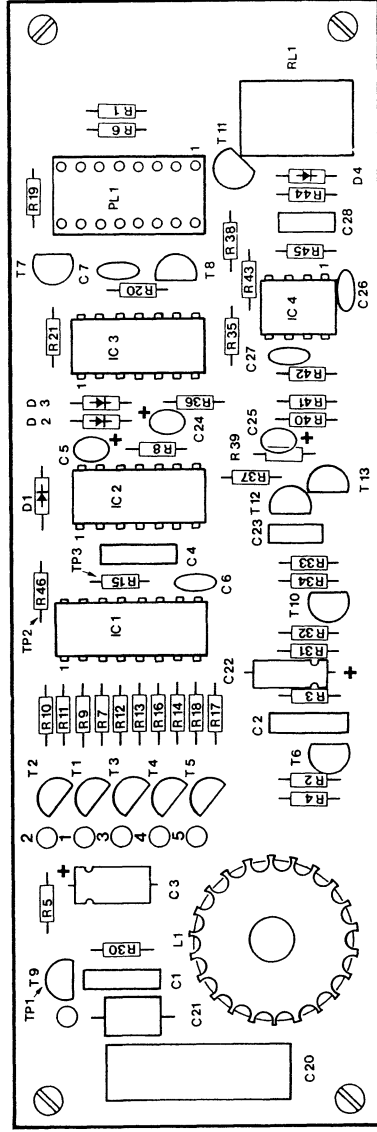



SELCALL 2716A
DRAWING No. 80.2716A

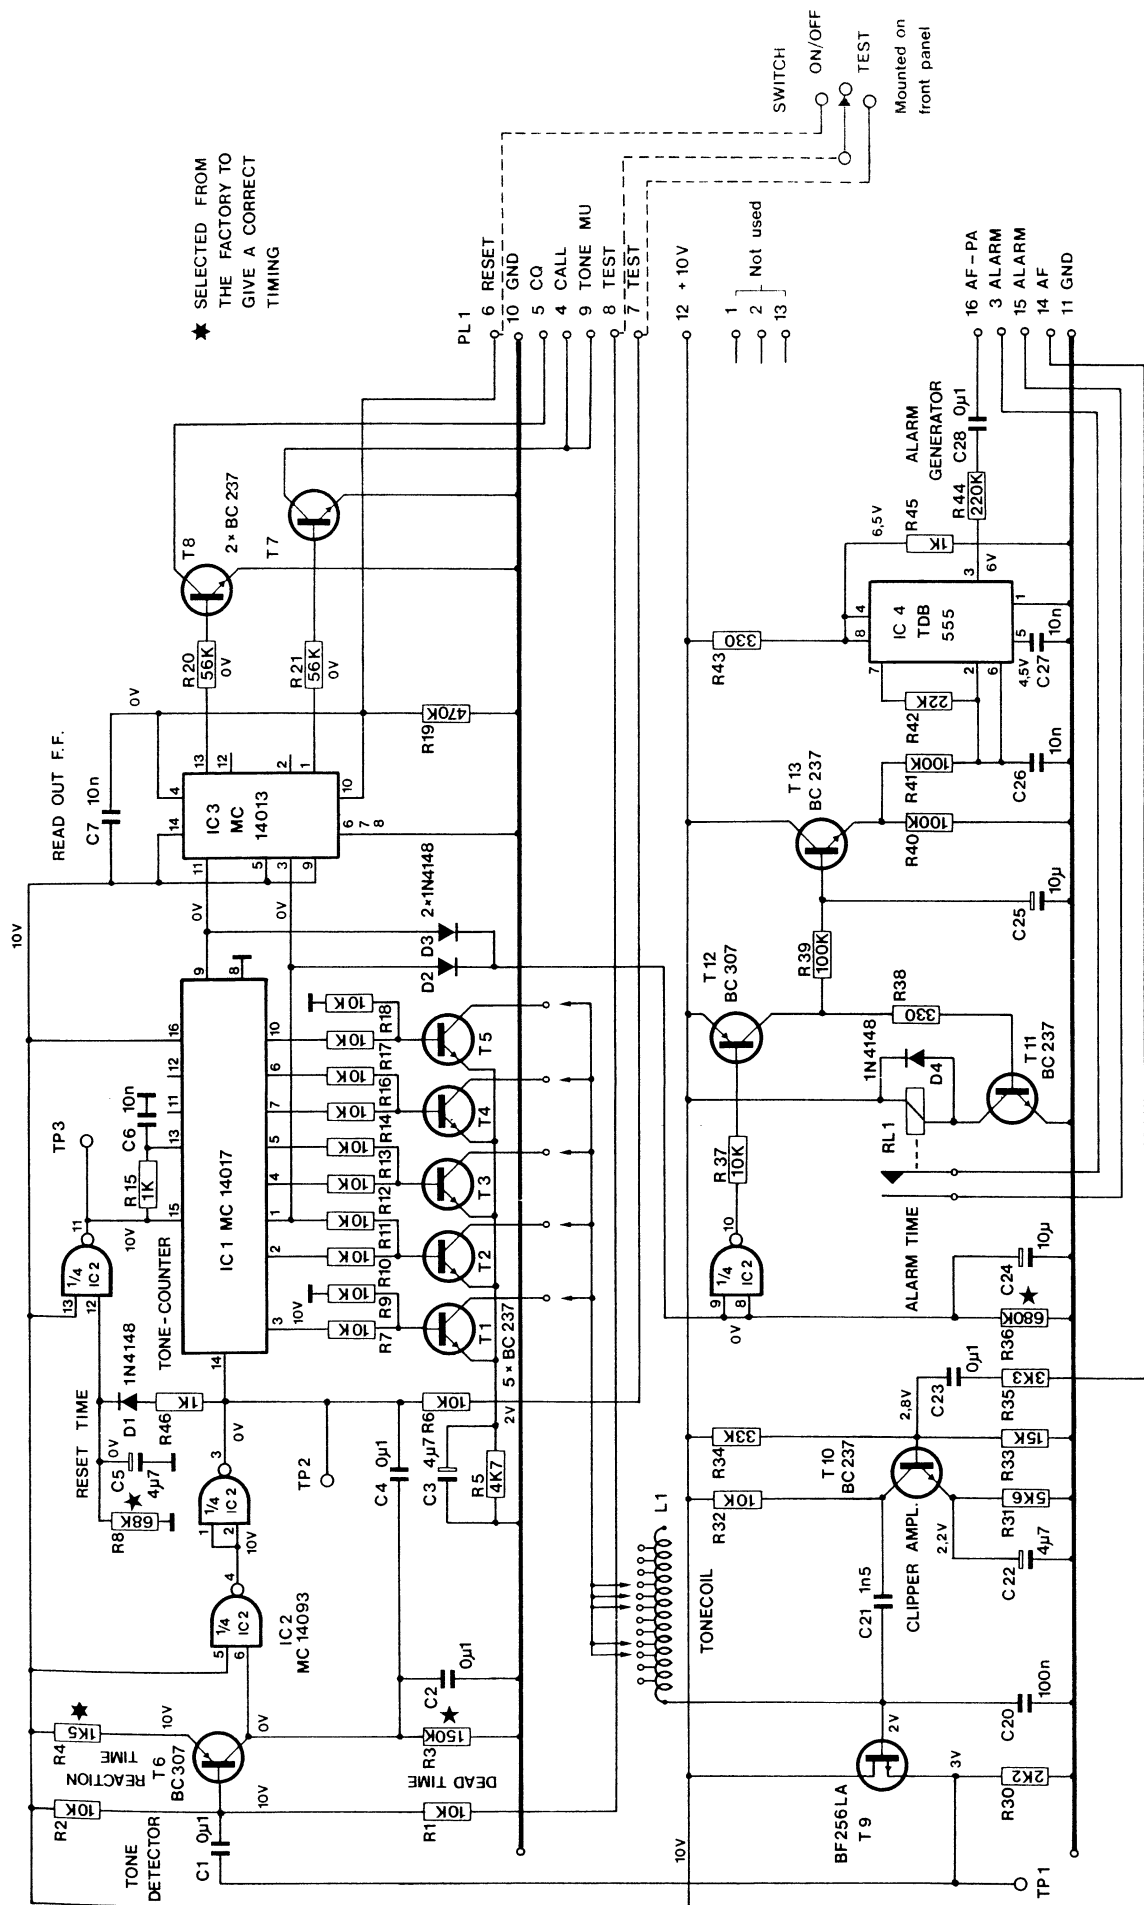

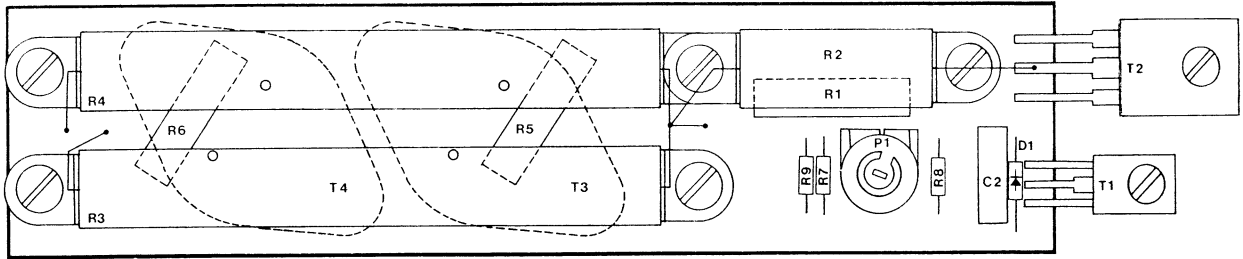

24V REGULATOR 2708
DRAWING No. 80.2708

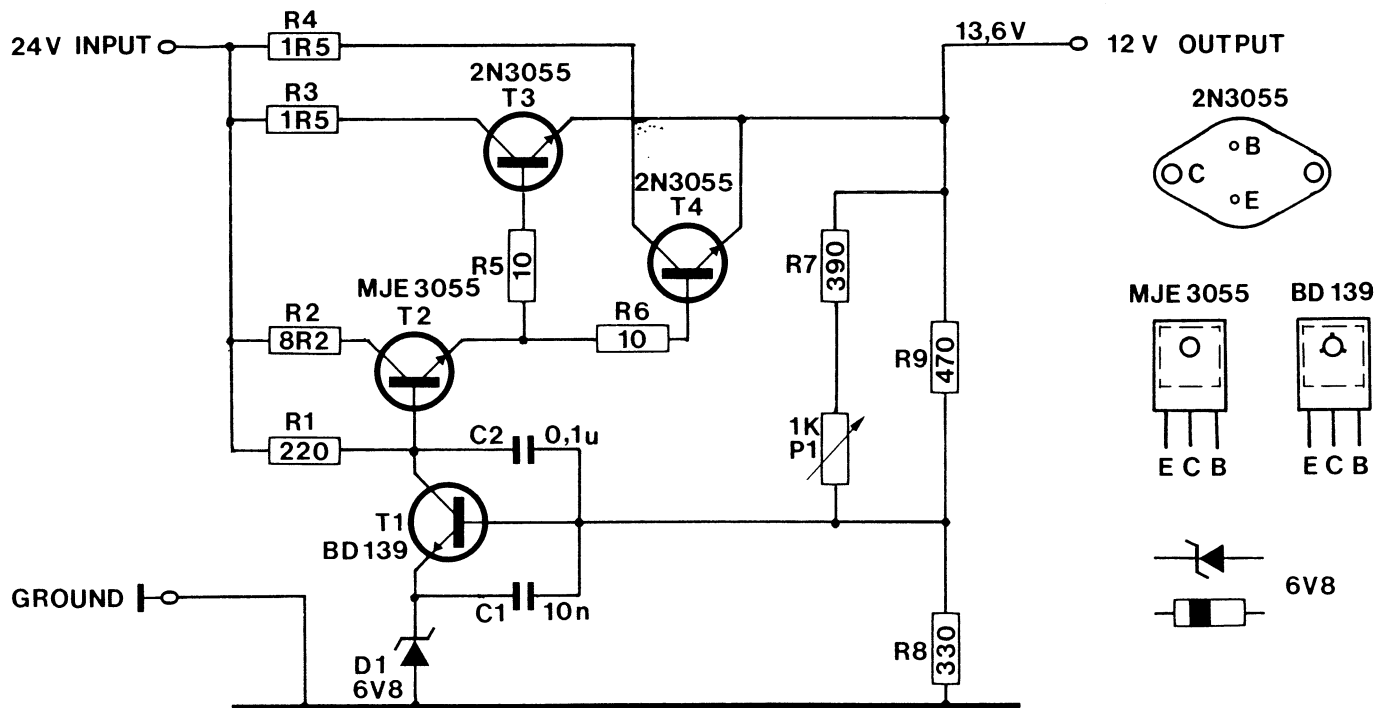

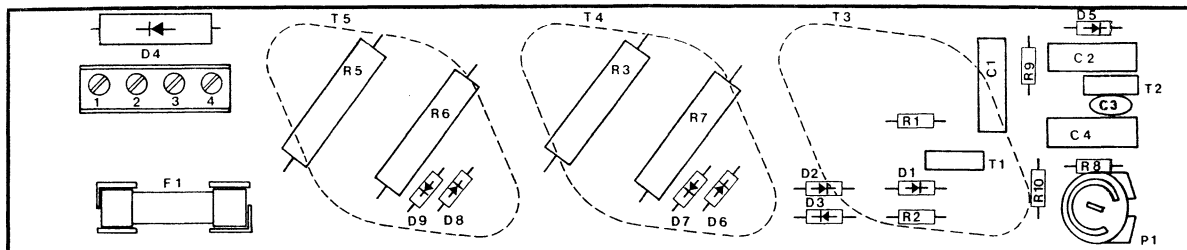


24-12V REGULATOR 2754
DRAWING No. 80.2754



BD 139 & BD 140




2N3055




1N4002 & 1N4148

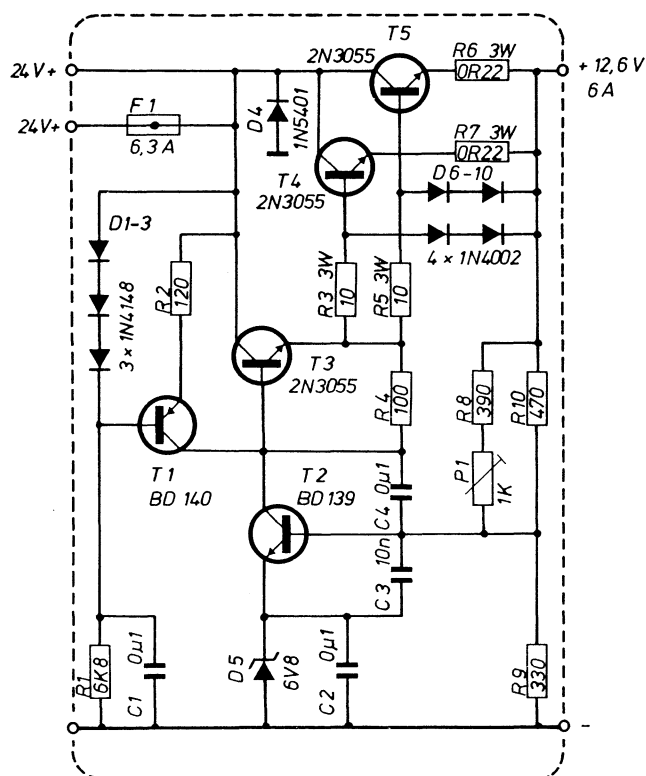

RS 24-12V REGULATOR 2754
DIAGRAM No. 92.7018

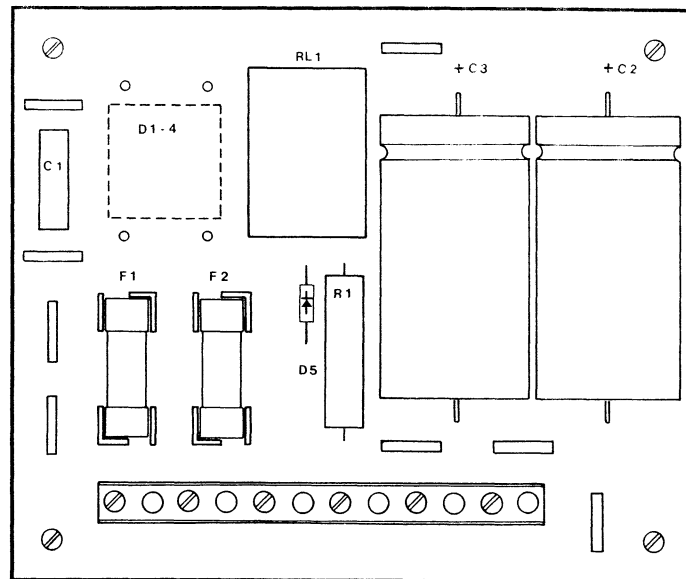

220 - 24V REGULATOR 2755
DRAWING No. 80.2755

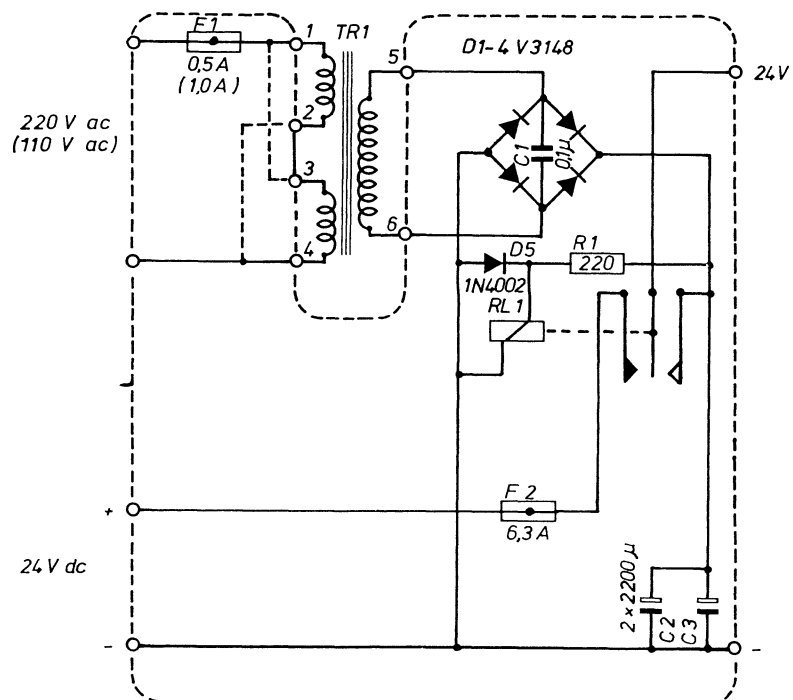

RS 220 - 24V REGULATOR 2755
DIAGRAM No. 92.7017

SYNTHESIZER 2787 B

R1	Resistor	180 ohm Philips	2322 211 13181	C15	Capacitor cer.	22p	Ferroperm	9/0116,9
R2	Resistor	1 Kohm Philips	2322 211 13102	C16	Capacitor tan.	22μ	ITT	TAG 22M25 SP
R3	Resistor	10 ohm Philips	2322 211 13109	C17	Capacitor sieb.	100n	Siemens	B37449 F6104 S2
R4	Resistor	220 ohm Philips	2322 211 13221	C18	Capacitor sieb.	100n	Siemens	B37449 F6104 S2
R5	Resistor	1 Kohm Philips	2322 211 13102					
R6	Resistor	4,7 Kohm Philips	2322 211 13472	T1	Transistor	Motorola		J 310
R7	Resistor	330 ohm Philips	2322 211 13331	T2	Transistor	Siemens		BF 199
R8	Resistor	100 ohm Philips	2322 211 13101	T3	Transistor	Siemens		BF 199
R9	Resistor	47 Kohm Philips	2322 211 13473	T4	Transistor	Siemens		BC 237
R10	Resistor	33 Kohm Philips	2322 211 13333					
R11	Resistor	1,5 Kohm Philips	2322 211 13152					
R12	Resistor	10 ohm Philips	2322 211 13109					
R13	Resistor	100 ohm Philips	2322 211 13101	IC1	Integrated cct.	Siemens		S 89
R14	Resistor	4,7 Kohm Philips	2322 211 13472	IC2	Integrated cct.	Siemens		S 187 B
R15	Resistor	33 Kohm Philips	2322 211 13333	IC3	Integrated cct.	Siemens		7407
R16	Resistor	220 ohm Philips	2322 211 13221	IC4	Integrated cct.	Siemens		7407
R17	Resistor	2,2 Kohm Philips	2322 211 13222					
R18	Resistor	10 ohm Philips	2322 211 13109	L1	Coil	R&S		
R19	Resistor	10 Kohm Philips	2322 211 13103					
R20	Resistor	10 Kohm Rohm	RM8 103J					
R21	Resistor	10 Kohm Rohm	RM6 103J					
R22	Resistor	1 Kohm Philips	2322 211 13102	X1	X-tal fil.	6.4MHz	NDK	6.4MHz
R23	Resistor	100 Kohm Philips	2322 211 13101					
C1	Capacitor poly.	0,1u Philips	2222 344 21104					
C2	Capacitor cer.	1n Draloric	EDRU 5					
C3	Capacitor cer.	1n Draloric	EDRU 5					
C4	Capacitor cer.	1n Draloric	EDRU 5					
C5	Capacitor trim.	2-22p Philips	2222 808 11229					
C6	Capacitor cer.	33p Ferroperm	9/0121,8					
C7	Capacitor cer.	1n Draloric	EDRU 5					
C8	Capacitor sieb.	100n Siemens	B37449 F6104 S2					
C9	Capacitor cer.	1n Draloric	EDRU 5					
C10	Capacitor sieb.	100n Siemens	B37449 F6104 S2					
C11	Capacitor cer.	1n Draloric	EDRU 5					
C12	Capacitor sieb.	100n Siemens	B37449 F6104 S2					
C13	Capacitor cer.	150n Ferroperm	9/0121,8					
C14	Capacitor cer.	150n Ferroperm	9/0121,8					

DISPLAY CCT. 2805

R1	Resistor	150 ohm Philips	2322 211 13151	IC1	Integrated cct.	Texas	74LS 47N
R2	Resistor	150 ohm Philips	2322 211 14151	IC2	Integrated cct.	Texas	72LS 47N
R3	Resistor	10 Kohm Philips	2322 211 13103				
R4	Resistor	10 Kohm Philips	2322 211 13103				
R5	Resistor	10 Kohm Philips	2322 211 13103	Display 1		Philips	CQY 81
R6	Resistor	10 Kohm Philips	2322 211 13103	Display 1		Philips	CQY 81
R7	Resistor	10 Kohm Philips	2322 211 13103				
R8	Resistor	150 ohm Philips	2322 211 13151				
R9	Resistor	150 ohm Philips	2322 211 13151				
R10	Resistor	150 ohm Philips	2322 211 13151				
R11	Resistor	150 ohm Philips	2322 211 13151				
R12	Resistor	150 ohm Philips	2322 211 13151				
R13	Resistor	150 ohm Philips	2322 211 13151				
R14	Resistor	150 ohm Philips	2322 211 13151				
R15	Resistor	150 ohm Philips	2322 211 13151				
R16	Resistor	150 ohm Philips	2322 211 13151				
R17	Resistor	150 ohm Philips	2322 211 13151				
R18	Resistor	150 ohm Philips	2322 211 13151				
R19	Resistor	150 ohm Philips	2322 211 13151				
R20	Resistor	150 ohm Philips	2322 211 13151				
R21	Resistor	150 ohm Philips	2322 211 13151				
R22	Resistor	10 Kohm Philips	2322 211 13103				
R23	Resistor	150 ohm Philips	2322 211 13151				
R24	Resistor	150 ohm Philips	2322 211 13151				
R25	Resistor	22 Kohm Philips	2322 211 13223				
D1	Diode	Siemens	1N4002				
D2-15	Diode	Siemens	1N4148				
D16	Diode	Siemens	1N4002				
LED 1	Light emitting diode	Litronic	RC 209				
LED 2	Light emitting diode	Litronic	RC 209				
LED 3	Light emitting diode	Litronic	RC 209				
LED 4	Light emitting diode	litronic	RC 209				
T1	Transistor	Siemens	BC 237				

RECEIVER, DRIVER & VCO 2793

R1	Resistor	56 Kohm Philips	2322 211 13563	R38	Resistor	150 ohm Philips	2322 211 13151
R2	Resistor	150 ohm Philips	2322 211 13151	R39	Resistor	2,7 Kohm Philips	2322 211 13272
R3	Resistor	56 Kohm Philips	2322 211 13563	R40	Resistor	47 ohm Philips	2322 211 13479
R4	Resistor	10 Kohm Philips	2322 211 13103	R41	Resistor	47 ohm Philips	2322 211 13479
R5	Resistor	10 Kohm Philips	2322 211 13103	R42	Resistor	470 ohm Philips	2322 211 13471
R6	Resistor	56 Kohm Philips	2322 211 13563	R43	Resistor	1,5 Kohm Philips	2322 211 13152
R7	Resistor	100 ohm Philips	2322 211 13101	R44	Resistor	1,5 Kohm Philips	2322 211 13152
R8	Resistor	56 Kohm Philips	2322 211 13563	R45	Resistor	22 ohm Philips	2322 211 13229
R9	Resistor	2,2 Kohm Philips	2322 211 13222	R46	Resistor	3,3 ohm Philips	2322 211 13332
R10	Resistor	100 ohm Philips	2322 211 13101	R47	Resistor	10 Kohm Philips	2322 211 13103
R11	Resistor	47 ohm Philips	2322 211 13479	R48	Resistor	47 ohm Philips	2322 211 13479
R12	Resistor	100 ohm Philips	2322 211 13101	R49	Resistor	100 ohm Philips	2322 211 13101
R13	Resistor	4,7 Kohm Philips	2322 211 13472	R50	Resistor	47 ohm Philips	2322 211 13479
R14	Resistor	10 Kohm Philips	2322 211 13103	R51	Resistor	47 ohm Philips	2322 211 13479
R15	Resistor	10 Kohm Philips	2322 211 13103	R52	Resistor	180 ohm Philips	2322 211 13181
R16	Selected in final test			R53	Resistor	330 ohm Philips	2322 211 13331
R17	Resistor	150 ohm Philips	2322 211 13151	R54	Resistor	22 Kohm Philips	2322 211 13229
R18	Resistor	2,2 Kohm Philips	2322 211 13222	R55	Resistor	10 Kohm Philips	2322 211 13103
R19	Resistor	100 ohm Philips	2322 211 13101	R56	Resistor	33 Kohm Philips	2322 211 13333
R20	Resistor	100 ohm Philips	2322 211 13101	R57	Resistor	22 Kohm Philips	2322 211 13223
R21	Resistor	2,2 Kohm Philips	2322 211 13222	R58	Resistor	10 Kohm Philips	2322 211 13103
R22	Resistor	100 Kohm Philips	2322 211 13104	R59	Resistor	33 Kohm Philips	2322 211 13333
R23	Resistor	2,2 Kohm Philips	2322 211 13222	R60	Resistor	33 Kohm Philips	2322 211 13333
R24	Resistor	3,3 Kohm Philips	2322 211 13332	R61	Resistor	47 Kohm Philips	2322 211 13473
R25	Resistor	100 ohm Philips	2322 211 13101	R62	Resistor	2,2 Kohm Philips	2322 211 13222
R26	Resistor	1,5 Kohm Philips	2322 211 13152	R63	Resistor	1,5 Kohm Philips	2322 211 13152
R27	Resistor	100 ohm Philips	2322 211 13101	R64	Resistor	1 Mohm Philips	2322 211 13118
R28	Resistor	10 Kohm Philips	2322 211 13103	R65	Resistor	100 Kohm Philips	2322 211 13104
R29	Resistor	10 Kohm Philips	2322 211 13103	R66	Resistor	5,6 Kohm Philips	2322 211 13562
R30	Resistor	10 Kohm Philips	2322 211 13103	R67	Resistor	2,2 Kohm Philips	2322 211 13222
R31	Resistor	3,3 Kohm Philips	2322 211 13332	R68	Resistor	1 Kohm Philips	2322 211 13102
R32	Resistor	3,3 Kohm Philips	2322 211 13332	R69	Resistor	10 Kohm Philips	2322 211 13103
R33	Resistor	4,7 Kohm Philips	2322 211 13472	R70	Resistor	47 ohm Philips	2322 211 13479
R34	Resistor	220 Kohm Philips	2322 211 13224	R71	Resistor	22 Kohm Philips	2322 211 13223
R35	Resistor	10 Kohm Philips	2322 211 13103	R72	Resistor	47 ohm Philips	2322 211 13479
R36	Resistor	100 ohm Philips	2322 211 13101	R73	Resistor	100 ohm Philips	2322 211 13101
R37	Resistor	10 Kohm Philips	2322 211 13103	R74	Resistor	22 ohm Philips	2322 211 13229

VHF PA 2728 B & 29 A

R1	Resistor	10 Kohm Philips	2322 211 13103	T1	Transistor	Motorola	HRF 238
R2	Resistor	220 Kohm Philips	2322 211 13224	T2	Transistor	Motorola	HRF 237
R3	Resistor	15 ohm Philips	2322 211 13159				
R4	Resistor	5,6 ohm Radio Parts	145130				
R5	Resistor	220 ohm Philips	2322 211 13221	RL1	Relay	Siemens	V23027 A0002 A101
C1	Capacitor cer.	470p Ferroperm	9/0129,9	L1	Coil	R&S	
C2	Capacitor cer.	470p Ferroperm	9/0129,9	L2	Coil	R&S	
C3	Capacitor cer.	15p Ferroperm	9/0116,9	L3	Coil	R&S	
C4	Capacitor cer.	33p Ferroperm	9/0115,9	L4	Coil Stripline		
C5	Capacitor cer.	33p Ferroperm	9/0116,8	L5	Coil Stripline		
C6	Capacitor cer.	15p Ferroperm	9/0116,9	L6	Coil	R&S	
C7	Capacitor cer.	470p Ferroperm	9/0129,9	L7	Coil	2,2uH Ferroperm	1583
C8	Capacitor cer.	470p Ferroperm	9/0129,9	L8	Coil Stripline		
C9	Capacitor cer.	470p Ferroperm	9/0129,9	L9	Coil Stripline		
C10	Capacitor trim.	5-60p Philips	2222 809 08003	L10	Coil Stripline		
C11	Capacitor cer.	470p Ferroperm	9/0129,9	L11	Coil Stripline		
C12	Capacitor cer.	82p Ferroperm	9/0121,9	L12	Coil Stripline		
C13	Capacitor feed through	In Ferroperm	9/0138,58	L13	Coil	R&S	
C14	Capacitor cer.	In Draloric	EDRU 5	L14	Coil	R&S	
C15	Capacitor tan.	4,7u ITT	TAG 4R7M25 SP	L15	Coil Stripline		
C16	Capacitor cer.	470p Ferroperm	9/0129,9	L16	Coil Stripline		
C17	Capacitor cer.	470p Ferroperm	9/0129,9				
C18	Capacitor cer.	82p Ferroperm	9/0121,9				
C19	Capacitor cer.	82p Ferroperm	9/0121,9				
C20	Capacitor cer.	82p Ferroperm	9/0121,9				
C21	Capacitor trim.	5-60p Philips	2222 809 08003				
C22	Capacitor cer.	22p Ferroperm	9/0116,9				
C23	Capacitor cer.	82p Ferroperm	9/0121,9				
C24	Capacitor cer.	In Draloric	EDRU 5				
C25	Capacitor lvt.	1u Matsushita	45 4200 370				
C26	Capacitor cer.	47p Ferroperm	9/0116,8				
C27	Capacitor cer.	22p Ferroperm	9/0116,9				
C28	Capacitor cer.	33p Ferroperm	9/0116,8				
D1	Diode	ITT	1N4148				
D2	Diode	ITT	1N4148				

P1	Potentiometer trim.	4,7 Kohm Philips	2322 410 05056	C35	Capacitor sieb.	0,1u	Siemens	B37 449 F6104 S2
P2	Potentiometer trim.	4,7 Kohm Philips	2322 410 05056	C36	Capacitor ellyt.	47u	ITT	45 42 00 130
C2	Capacitor cer.	2,2p	9/0116,9	C37	Capacitor sieb.	0,1u	Siemens	1337 449 F6104 S2
C3	Capacitor cer.	4,7p	9/0116,9	C38	Capacitor cer.	1n	Draloric	EDRU 5
C4	Capacitor cer.	6,8p	9/0116,9	C39	Capacitor sty.	1n	Philips	2222 426 41002
C5	Capacitor cer.	0,47p	9/0110,9	C40	Capacitor cer.	1n	Draloric	EDRU 5
C6	Capacitor cer.	1n	EDRU 5	C41	Capacitor sieb.	47n	Siemens	B37 449 F6473 S2
C7	Capacitor cer.	12p	9/0116,9	C42	Capacitor sieb.	47n	Siemens	B37 449 F6473 S2
C8	Capacitor cer.	4,7p	9/116,9	C43	Capacitor sieb.	0,10	Siemens	B37 449 F6104 S2
C9	Capacitor cer.	1n	EDRU 5	C44	Capacitor cer.	15p	Ferroperm	9/0116,9
C10	Capacitor cer.	10n	EDRU 5	C45	Capacitor cer.	6,8p	Ferroperm	9/0116,9
C11	Capacitor cer.	3,3p	9/0116,9	C46	Capacitor cer.	8,2p	Ferroperm	9/0116,9
C12	Capacitor cer.	4,7p	9/0116,9	C47	Capacitor trim.	2-22p	Philips	2222 808 11229
C13	Capacitor cer.	1n	EDRU 5	C48	Capacitor cer.	1n	Draloric	EDRU 5
C14	Capacitor cer.	10n	EDRU 5	C49	Capacitor cer.	1n	Draloric	EDRU 5
C15	Capacitor cer.	10p	9/0116,9	C50	Capacitor ellyt.	47u	ITT	454200130
C16	Capacitor cer.	4,7p	9/0116,9	C51	Capacitor cer.	1n	Draloric	EDRU 5
C17	Capacitor sieb.	0,1u	B37 449 F6104 S2	C52	Capacitor cer.	1n	Draloric	EDRU 5
C18	Capacitor cer.	1n	EDRU 5	C53	Capacitor cer.	6,8p	Ferroperm	9/0116,9
C19	Capacitor cer.	47p	9/0116,8	C54	Capacitor cer.	22p	Ferroperm	9/0116,9
C20	Capacitor cer.	3,3p	9/0116,9	C55	Capacitor cer.	1n	Draloric	EDRU 5
C21	Capacitor cer.	1n	EDRU 5	C56	Capacitor cer.	3,3p	Ferroperm	9/0116,9
C22	Capacitor sty.	220p	2222 427 42201	C57	Capacitor cer.	1n	Draloric	EDRU 5
C23	Capacitor sty.	120p	2222 427 41201	C58	Capacitor cer.	1n	Draloric	EDRU 5
C24	Capacitor cer.	1n	EDRU 5	C59	Capacitor cer.	1n	Draloric	EDRU 5
C25	Capacitor cer.	56p	9/0116,8	C60	Capacitor cer.	82p	Draloric	EDRU 5
C26	Capacitor cer.	10n	EDRU 5	C61	Capacitor cer.	1n	Draloric	EDRU 5
C27	Capacitor sieb.	0,1u	B37 449 F6104 S2	C62	Capacitor tan.	10u	ITT	TAG 10M25 SP
C28	Capacitor cer.	56p	9/0116,8	C63	Capacitor trim.	2-10p	Philips	2222 808 11109
C29	Capacitor sty.	220	2222 427 42201	C64	Capacitor cer.	12p	Ferroperm	9/0116,9
C30	Capacitor cer.	65p	9/0116,8	C65	Capacitor cer.	8,2p	Ferroperm	9/0116,9
C31	Capacitor cer.	10n	EDRU 5	C66	Capacitor cer.	3,3p	Ferroperm	9/0116,9
C32	Capacitor sty.	1,8n	2222 425 41802	C67	Capacitor tan.	10u	ITT	TAG 10M25 SP
C33	Capacitor cer.	1n	EDRU 5	C68	Capacitor sieb.	47n	Siemens	B37 449 F6473 S2
C34	Capacitor sieb.	0,1u	B37 449 F6104 S2	C69	Capacitor tan.	1u	ITT	TAG FR035 SP
				C70	Capacitor tan.	4,7u	Kemet	T399C475M016BC
				C71	Capacitor cer.	1n	Draloric	EDRU 5

C72	Capacitor sty.	2,7n	Philips	2222 425 42702	IC1	Integrated cct.	Siemens	5042 P
C73	Capacitor cer.	1n	Draloric	EDRU 5	IC2	Integrated cct.	Siemens	FBA 120 5
C74	Capacitor cer.	3,3p	Ferroperm	9/0116,9	IC3	Integrated cct.	Siemens	uA 741
C75	Capacitor cer.	3,3p	Ferroperm	9/0116,9				
D1	Diode		Siemens	BB 105 G	X1	Crystal	R&S	10,245 MHz
D2	Diode		Siemens	BB 105 G				
D3	Diode		Siemens	BB 105 G	FL1	Crystal-filter	R&S	10,700 MHz
D4	Diode		Siemens	BB 105 G				
D5	Diode		Siemens	BB 105 G	L1	Coil	R&S	4718
D6	Diode		Siemens	BA 243	L2	Coil	R&S	4720
D7	Diode		Siemens	1N4148	L3	Coil	R&S	4720
					L4	Coil	R&S	4721
T1	Transistor		Siemens	J 310	L5	Coil	NEOSID	5170
T2	Transistor		Intersil	2N5484/85	L6	Coil	R&S	4713
T3	Transistor		Intersil	2N5484/85	L7	Coil	NEOSID	5163
T4	Transistor		Siemens	BC 237	L8	Coil	NEOSID	5999
T5	Transistor		Siemens	BC 237	L9	Coil	NEOSID	5961
T6	Transistor		Siemens	J 310	L10	Coil	NEOSID	5968
T7	Transistor		Siemens	BF 199	L11	Coil	R&S	4733
T8	Transistor		Siemens	BF 237	L12	Coil	R&S	4713
T9	Transistor		Siemens	BC 237	L13	Coil	R&S	4733
T10	Transistor		Siemens	BD 139	L14	Coil, drossel	Ferroperm	0,1uH 1588
T11	Transistor		Mototola	2N4427	L15	Coil	R&S	4713
T12	Transistor		Siemens	BF 763	L16	Coil	R&S	4713
T13	Transistor		Siemens	BC 237	L17	Coil	R&S	4712
T14	Transistor		Intersil	2N5484/85	L18	Coil	R&S	4713
T15	Transistor		Intersil	2N5484/85				
T16	Transistor		Intersil	2N5484/85				
T17	Transistor		Siemens	BC 237				
T18	Transistor		Siemens	BC 237				
T19	Transistor		Siemens	BC 307				
T20	Transistor		Siemens	BC 237				
T21	Transistor		Siemens	BC 237				
T22	Transistor		Intersil	2N5484/85				

AF MODULATOR & CONTROL BOARD 2801 I

R1	Resistor	4,7 Kohm Philips	2322 211 13472	R38	Resistor	2,2 ohm Philips	2322 211 13228
R2	Resistor	5,6 Kohm Philips	2322 211 13562	R39	Resistor	10 Kohm Rohm	RM6 103 J
R3	Resistor	82 Kohm Philips	2322 211 13823	R40	Resistor	10 Kohm Rohm	RM6 103 J
R4	Resistor	10 Kohm Philips	2322 211 13103	R41	Resistor	10 Kohm Rohm	RM6 103 J
R5	Resistor	10 Kohm Philips	2322 211 13103	R42	Resistor	10 Kohm Rohm	RM8 103 J
R6	Resistor	33 Kohm Philips	2322 211 13333	R43	Resistor	22 ohm Philips	2322 211 13229
R7	Resistor	1,5 Kohm Philips	2322 211 13152	R44	Resistor	100 ohm Philips	2322 211 13101
R8	Resistor	100 Kohm Philips	2322 211 13104	R45	Resistor	12 Kohm Philips	2322 211 13123
R9	Resistor	8,2 Kohm Philips	2322 211 13822	R46	Resistor	12 Kohm Philips	2322 211 13123
R10	Resistor	1 Kohm Philips	2322 211 13102	R47	Resistor	330 Kohm Philips	2322 211 13334
R11	Resistor	470 Kohm Philips	2322 211 13474	R48	Resistor	22 Kohm Philips	2322 211 13223
R12	Resistor	10 Kohm Philips	2322 211 13103	R49	Resistor	100 ohm Philips	2322 211 13101
R13	Resistor	2,2 Kohm Philips	2322 211 13222	R50	Resistor	1 Kohm Philips	2322 211 13102
R14	Resistor	220 ohm Philips	2322 211 13221	R51	Resistor	10 Kohm Philips	2322 211 13103
R15	Resistor	150 Kohm Philips	2322 211 13154	R52	Resistor	10 Kohm Philips	2322 211 13103
R16	Resistor	22 Kohm Philips	2322 211 13223	R53	Resistor	10 Kohm Philips	2322 211 13103
R17	Resistor	10 Kohm Philips	2322 211 13103	R54	Resistor	10 Kohm Philips	2322 211 13103
R18	Resistor	2,2 Kohm Philips	2322 211 13222	R55	Resistor	1 Kohm Philips	2322 211 13102
R19	Resistor	4,7 Kohm Philips	2322 211 13472	R56	Resistor	10 Kohm Philips	2322 211 13103
R20	Resistor	100 Kohm Philips	2322 211 13104	R57	Resistor	220 Kohm Philips	2322 211 13224
R21	Resistor	2,2 Kohm Philips	2322 211 13222	R58	Resistor	220 Kohm Philips	2322 211 13224
R22	Resistor	180 Kohm Philips	2322 211 13184	R59	Resistor	2,2 Kohm Philips	2322 211 13222
R23	Resistor	2,2 Kohm Philips	2322 211 13222	R60	Resistor	6,8 Kohm Philips	2322 211 13682
R24	Resistor	100 ohm Philips	2322 211 13101	R61	Resistor	10 Kohm Philips	2322 211 13103
R25	Resistor	220 Kohm Philips	2322 211 13224	R62	Resistor	220 Kohm Philips	2322 211 13224
R26	Resistor	680 ohm Philips	2322 211 13689	R63	Resistor	8,2 Kohm Philips	2322 211 13822
R27	Resistor	2,2 ohm Philips	2322 211 13228	R64	Selected by factory		
R28	Resistor	100 ohm Philips	2322 211 13101	R65	Resistor	470 Kohm Philips	2322 211 13474
R29	Resistor	2,7 ohm Radio Parts	14 51 26	R66	Resistor	47 Kohm Philips	2322 211 13473
R30	Resistor	2,7 ohm Radio Parts	14 51 26	R67	Resistor	1 Kohm Philips	2322 211 13102
R31	Resistor	100 Kohm Philips	2322 211 13104	R68	Resistor	150 ohm Philips	2322 211 13151
R32	Resistor	10 Kohm Philips	2322 211 13103	R69	Resistor	1 Kohm Philips	2322 211 13102
R33	Resistor	10 Kohm Philips	2322 211 13103	R70	Resistor	2,2 Kohm Philips	2322 211 13222
R34	Not used			R71	Resistor	15 Kohm Philips	2322 211 13153
R35	Resistor	2,2 ohm Philips	2322 211 13228	R72	Resistor	470 ohm Philips	2322 211 13471
R36	Resistor	1 Kohm Philips	2322 211 13102	R73	Resistor	820 ohm Philips	2322 211 13829
R37	Resistor	10 Kohm Philips	2322 211 13103	R74	Resistor	100 ohm Philips	2322 211 13101

R75	Resistor	1 Kohm Philips	2322 211 13102	C9	Capacitor ellyt.	10u	Matsushita	45 4200 170
R76	Resistor	470 ohm Philips	2322 211 13471	C10	Capacitor ellyt.	1u	Matsushita	45 4200 370
R77	Resistor	1 Kohm Philips	2322 211 13102	C11	Capacitor poly.	10n	Philips	2222 344 55103
R78	Resistor	470 ohm Philips	2322 211 13479	C12	Capacitor poly.	0,22u	Philips	2222 344 21224
R79	Resistor	2,2 Kohm Philips	2322 211 13222	C13	Capacitor sty.	3,3n	Philips	2222 425 43302
R80	Resistor	10 Kohm Philips	2322 211 13103	C14	Capacitor sieb.	0,1u	Siemens	B37 449 F6104 S2
R81	Resistor	2,2 Kohm Philips	2322 211 13222	C15	Capacitor ellyt.	1u	Matsushita	45 4200 370
R82	Resistor	1,5 Kohm Philips	2322 211 13152	C16	Capacitor ellyt.	10u	Matsushita	45 4200 170
R83	Resistor	3,3 Kohm Philips	2322 211 13332	C17	Capacitor poly.	10n	Philips	2222 344 55103
R84	Resistor	3,3 Kohm Philips	2322 211 13332	C18	Capacitor cer.	1n	Draloric	EDRU 5
R85	Resistor	10 Kohm Philips	2322 211 13103	C19	Capacitor tan.	22u	ITT	TAG 22M25 SP
R86	Resistor	1 Kohm Philips	2322 211 13102	C20	Capacitor ellyt.	100u	Philips	2222 016 36101
R87	Resistor	10 Kohm Philips	2322 211 13103	C21	Capacitor cer.	10n	Draloric	EDRU 5
R88	Resistor	560 ohm Philips	2322 211 13561	C22	Capacitor sieb.	0,1u	Siemens	B37 449 F6104 S2
R89	Resistor	22 Kohm Philips	2322 211 13223	C23	Capacitor cer.	1n	Draloric	EDRU 5
R90	Resistor	2,2 ohm Philips	2322 211 13228	C24	Capacitor ellyt.	470u	Philips	2222 032 16471
R91	Resistor	2,2 ohm Philips	2322 211 13228	C25	Capacitor tan.	22u	ITT	TAG 22M25 SP
R92	Resistor	8,2 Kohm Philips	2322 211 13822	C26	Capacitor sieb.	47n	Siemens	B37 16473 S2
R93	Resistor	10 Kohm Philips	2322 211 13103	C27	Capacitor sieb.	0,1u	Siemens	B37 449 F6104 S2
R94	Resistor	10 Kohm Philips	2322 211 13103	C28	Capacitor sieb.	0,1u	Siemens	B37 449 F6104 S2
P1	Potentiom.	10 Kohm Philips	2322 410 30507	C29	Capacitor tan.	22u	ITT	TAG 22M25 SP
P2	Potentiom.	10 Kohm Rowido	813 342 SPEC.	C30	Capacitor cer.	10n	Draloric	EDRU 5
P3	Potentiom.	470 ohm Philips	2322 410 03353	C31	Capacitor sieb.	0,1u	Siemens	B37 449 F6104 S2
P4	Potentiom.	22 Kohm Rowido	803 301 SPEC.	C32	Capacitor sty.	1,5n	Philips	2222 426 41502
P5	Potentiom.	4,7 Kohm Philips	2322 410 03356	C33	Capacitor poly.	10n	Philips	2222 344 55103
P6	Potentiom.	10 Kohm Philips	2322 410 30507	C34	Capacitor ellyt.	10µ	Matsushita	45 4200 170
P7	Potentiom.	10 Kohm Rowido	813 342 SPEC.	C35	Capacitor ellyt.	4,7u	ITT	45 4020 199
C1	Capacitor ellyt.	1u Matsushita	45 4200 370	C36	Capacitor ellyt.	1u	Matsushita	45 4200 370
C2	Capacitor sty.	1n Philips	2222 427 41001	C37	Capacitor ellyt.	10u	Matsushita	45 4200 170
C3	Capacitor sty.	220p Philips	2222 427 42201	C38	Capacitor ellyt.	1u	Matsushita	45 4200 370
C4	Capacitor sty.	1n Philips	2222 427 41001	C39	Capacitor sieb.	0,1u	Siemens	B37 449 F6104 S2
C5	Capacitor ellyt.	10u Matsushita	45 4200 170	C40	Capacitor ellyt.	10u	Matsushita	45 4200 170
C6	Capacitor sieb.	0,1u Siemens	B37449 F6104 S2	C41	Capacitor sty.	1n	Philips	2222 427 41001
C7	Capacitor cer.	470p Ferroperm	9/0129,9	C42	Capacitor poly.	33n	Philips	2222 344 55333
C8	Capacitor poly.	10n Philips	2222 344 55103	C43	Capacitor tan.	10u	ITT	TAG 10M25 SP
				C44	Capacitor tan.	22u	ITT	TAG 22M25 SP
				C45	Capacitor cer.	1n	Draloric	EDRU 5

C46	Capacitor poly.	15n	Philips	2222 344 55153	T12	Transistor	Siemens	BC 237
C47	Capacitor electrolyt.	10u	Matsushita	45 4200 170	T13	Transistor	Siemens	BD 140
C48	Capacitor cer.	10n	Draloric	EDRU 5	T14	Transistor	Siemens	BC 237
C49	Capacitor electrolyt.	10u	Matsushita	45 4200 170	T15	Transistor	Siemens	BC 237
C50	Capacitor electrolyt.	100u	Philips	2222 016 36101	T16	Transistor	Siemens	BC 237
C51	Capacitor sieb.	47n	Siemens	B37 449 F6473 S2	T17	Transistor	Siemens	BC 307
C52	Capacitor sieb.	47n	Siemens	B37 F6473 S2	T18	Transistor	Siemens	BD 139
					T19	Transistor	Siemens	BC 237
D1	Diode		ITT	1N4148	IC1	Integrated cct.	Texas	MC 1458
D2	Diode		ITT	1N4148	IC2	Integrated cct.	Texas	MC 1458
D3	Diode		ITT	1N4148	IC3	Integrated cct.	Siemens	IDA 1037
D4	Diode		ITT	1N4148	IC4	Integrated cct.	Texas	7805
D5	Diode		ITT	1N4148	IC5	Integrated cct.	Texas	TDR 0555
D6	Diode		ITT	1N4148	IC6	Integrated cct.	Texas	74LS33
D7	Diode		Siemens	AA 116	IC7	Integrated cct.	Harris	PROM 7611
D8	Diode		ITT	1N4148	IC8	Integrated cct.	Harris	PROM 7611
D9	Diode		ITT	1N4148	IC9	Integrated cct.	Harris	PROM 7611
D10	Diode		ITT	1N4148	IC10	Integrated cct.	Texas	74LS33
D11	Diode		ITT	1N4148	IC11	Integrated cct.	Texas	MC 1458
D12	Diode		ITT	1N4148				
D13	Diode		ITT	1N4148				
D14	Diode		Philips	5401				
D15	Diode		ITT	1N4148				
D16	Diode		ITT	1N4148				
Z1	Diode, zener		Siemens	8,2V				
T1	Transistor		Siemens	BC 307				
T2	Transistor		Siemens	BC 237				
T3	Transistor		Siemens	BC 307				
T4	Transistor		Siemens	BC 237				
T5	Transistor		Siemens	BC 237				
T6	Transistor		Siemens	BC 237				
T7	Transistor		Siemens	BC 237				
T8	Transistor		Siemens	BC 237				
T9	Transistor		Intersil	2N5485 / 85				
T10	Transistor		Siemens	BC 237				
T11	Transistor		Siemens	BC 237				

SELCALL 2716 A

R1	Resistor	10 Kohm Philips	2322 211 13103	R46	Resistor	1 Kohm Philips	2322 211 13102
R2	Resistor	10 Kohm Philips	2322 211 13103				
R3	Selected in final test						
R4	Selected in final test						
R5	Resistor	4,7 Kohm Philips	2322 211 13472	C1	Capacitor poly.	0,1u Philips	2222 344 21104
R6	Resistor	10 Kohm Philips	2322 211 13103	C2	Capacitor poly	0,1u Philips	2222 344 21104
R7	Resistor	10 Kohm Philips	2322 211 13103	C3	Capacitor ellyt.	4,7u ITT	45 40 20 199
R8	Selected in final test			C4	Capacitor poly	0,1u Philips	2222 344 21104
R9	Resistor	10 Kohm Philips	2322 211 13103	C5	Capacitor tan.	4,7u ITT	TAL 4R7M25 SP
R10	Resistor	10 Kohm Philips	2322 211 13103	C6	Capacitor cer.	10n Draloric	EDRU 5
R11	Resistor	10 Kohm Philips	2322 211 13103	C7	Capacitor cer.	10n Draloric	EDRU 5
R12	Resistor	10 Kohm Philips	2322 211 13103	C20	Capacitor sty.	100n Rifa	PFC 216 00610F
R13	Resistor	10 Kohm Philips	2322 211 13103	C21	Capacitor sty.	1,5n Philips	2222 425 41502
R14	Resistor	10 Kohm Philips	2322 211 13103	C22	Capacitor ellyt.	4,7u ITT	45 40 20 199
R15	Resistor	10 Kohm Philips	2322 211 13103	C23	Capacitor sieb.	0,1u Siemens	B37449 S2
R16	Resistor	1 Kohm Philips	2322 211 13102	C24	Capacitor tan.	10u ITT	TAG 10M25 SP F6104 S2
R17	Resistor	10 Kohm Philips	2322 211 13103	C25	Capacitor tan.	10u ITT	TAG 10M25 SP
R18	Resistor	10 Kohm Philips	2322 211 13103	C26	Capacitor cer.	10n Draloric	EDRU 5
R19	Resistor	470 Kohm Philips	2322 211 13103	C27	Capacitor cer.	10n Draloric	EDRU 5
R20	Resistor	56 Kohm Philips	2322 211 13474	C28	Capacitor sieb.	0,1u Siemens	B37449 F6109 S2
R21	Resistor	56 Kohm Philips	2322 211 13563				
R30	Resistor	2,2 Kohm Philips	2322 211 13222	D1	Diode	Siemens	1N4148
R31	Resistor	5,6 Kohm Philips	2322 211 13562	D2	Diode	Siemens	1N4148
R32	Resistor	10 Kohm Philips	2322 211 13103	D3	Diode	Siemens	1N4148
R33	Resistor	15 Kohm Philips	2322 211 13153	D4	Diode	Siemens	1N4148
R34	Resistor	33 Kohm Philips	2322 211 13333				
R35	Resistor	3,3 Kohm Philips	2322 211 13332				
R36	Selected in final test			T1	Transistor	Siemens	BC 237
R37	Resistor	10 Kohm	2322 211 13103	T2	Transistor	Siemens	BC 237
R38	Resistor	330 Kohm	2322 211 13331	T3	Transistor	Siemens	BC 237
R39	Resistor	100 Kohm	2322 211 13104	T4	Transistor	Siemens	BC 237
R40	Resistor	100 Kohm	2322 211 13104	T5	Transistor	Siemens	BC 237
R41	Resistor	100 Kohm	2322 211 13104	T6	Transistor	Siemens	BC 307
R42	Resistor	22 Kohm	2322 211 13223	T7	Transistor	Siemens	BC 237
R43	Resistor	330 Kohm	2322 211 13331	T8	Transistor	Siemens	BC 237
R44	Resistor	220 Kohm	2322 211 13224	T9	Transistor	Texas	BC 256 LA
R45	Resistor	1 Kohm	2322 211 13102	T10	Transistor	Siemens	BC 237

24V REGULATOR 2708

T11	Transistor	Siemens	BC 237	R1	Resistor	3w, 220	ohm Philips	2322 211 13221
T12	Transistor	Siemens	BC 307	R2	Resistor	6w, 8, 2	ohm Diplomatic	146132
T13	Transistor	Siemens	BC 237	R3	Resistor	17w, 1, 5	ohm Diplomatic	149123
				R4	Resistor	17w, 1, 5	ohm Diplomatic	149123
L1	Tonecoil	R&S		R5	Resistor	3w, 10	ohm Philips	2322 211 13109
				R6	Resistor	3w, 10	ohm Philips	2322 211 13109
				R7	Resistor	390	ohm Philips	2322 211 13391
IC1	Integrated cct.	Mototola	MC 14017	R8	Resistor	330	ohm Philips	2322 211 13331
IC2	Integrated cct.	Motorola	MC 14093	R9	Resistor	470	ohm Philips	2322 211 13471
IC3	Integrated cct.	Motorola	MC 14013					
IC4	Integrated cct.	Texas	TDB 555	P1	Potentiom. trim.	1 Kohm Philips		2322 410 03554
				C1	Capacitor cer.	10n	Draloric	EDRU 5
				C2	Capacitor poly.	0,1u	Philips	2222 344 21104
				T1	Transistor		Siemens	BD 139
				T2	Transistor		Motorola	MJE 3055
				T3	Transistor		Siemens	2N3055
				T4	Transistor		Siemens	2N3055
				D1	Diode, zener		Siemens	6,8V

RS 24-12 2754

RS 220-24 2755

R1	Resistor	6,8 Kohm	Philips	2322 211 13682	R1	Resistor	3w,220 ohm	Philips	2322 211 13221
R2	Resistor	120 ohm	Philips	2322 211 13121					
R3	Resistor	3w,10 ohm	Philips	2322 211 13109					
R4	Resistor	100 ohm	Philips	2322 211 13101	C1	Capacitor poly.	0,1u	Philips	2222 344 21104
R5	Resistor	3w,10 ohm	Philips	2322 211 13109	C3	Capacitor ellyt.	2200u	Frako	108 333
R6	Resistor	3w,0,22 ohm	Philips	145 105	C4	Capacitor ellyt.	2200u	Frako	108 333
R7	Resistor	3w,0,22 ohm	Philips	145 105					
R8	Resistor	390 ohm	Philips	2322 211 13391					
R9	Resistor	330 ohm	Philips	2322 211 13331	D1-4	Diode, bridge		Radio Parts	1N148H 004350
R10	Resistor	470 ohm	Philips	2322 211 13471	D5	Diode		ITT	1N4002
P1	Potentiom, pre. set.	1 Kohm	Philips	2322 410 03354					
C1	Capacitor poly.	0,1u	Philips	2222 344 21104					
C2	Capacitor poly.	0,1u	Philips	2222 344 21104					
C3	Capacitor cer.	10n	Draloric	EDRU 5					
C4	Capacitor poly.	0,1u	Philips	222 344 21104					
D1	Diode		ITT	1N4148					
D2	Diode		ITT	1N4148					
D3	Diode		ITT	1N4148					
D4	Diode		Philips	1N5401					
D5	Diode, zener		Siemens	6,8V					
D6-10	Diode		ITT	1N4002					
T1	Transistor		Siemens	BD 140					
T2	Transistor		Siemens	BD 139					
T3	Transistor		Siemens	2N3055					
T4	Transistor		Siemens	2N3055					
T5	Transistor		Siemens	2N3055					